



# 6W

INDUCTION MOTOR □ 60mm LEAD WIRE TYPE

SIZE mm sq.	Type	Poles	Output (W)	Voltage (V)	Frequency (Hz)	Duty	Rated Load				Starting Torque		Capacitor (uF)
							Current (A)	Speed (rpm)	Torque (kg-cm) (N-m)		(kg-cm)	(N-m)	
60	S6I06GA S6I06GACE	4	6	1 φ 110	60	Cont.	0.20	1550	0.40	0.040	0.55	0.055	2.5
	S6I06GB S6I06OBCE	4	6	1 φ 220	60	Cont.	0.10	1550	0.40	0.040	0.55	0.055	0.7
	S6I06GC S6I06QCCE	4	6	1 φ 100	50 60	Cont.	0.21 0.19	1200 1500	0.50 0.42	0.050 0.042	0.45	0.045	2.5
	S6I06GD S6I06QDCE	4	6	1 φ 200	50 60	Cont.	0.10	1200 1500	0.50 0.42	0.050 0.042	0.45	0.045	0.7
	S6I06GE S6I06GECE	4	6	1 φ 100 1 φ 115	50 60	Cont.	0.18 0.19 0.19	1200 1500	0.50 0.42	0.050 0.042	0.52 0.55	0.052 0.055	2.5 2.0
	S6I06GX S6I06QXCE	4	6	1 φ 220 1 φ 240	50	Cont.	0.08 0.09	1200	0.50 0.53	0.050 0.053	0.50 0.55	0.050 0.055	0.6

- ◆ S6I06GE is UL approved (UL FILE No. E172722) impedance protected type.
- ◆ Appropriate capacitors shall be used according to the voltage for S6I06GE type since the size of the capacitor differs by different voltages. Malfunction may occur when not used properly. Capacitor for 115V will be delivered otherwise informed of the required voltage.
- ◆ CE marked at the end of model name indicates that it is impedance protected type which has received CE. S6I06GECE is available only for 115V specification.
- ◆ "L" or "H" type does not apply to motors under 40W.

## 50Hz

MODEL	GEAR RATIO	rpm																								
		3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200	250
S6DA□B	kg-cm	1.3	1.5	2.1	2.6	3.2	3.9	4.3	5.4	6.4	7.7	7.7	9.7	11.6	13.9	15.5	17.5	21.0	26.2	30.0	30.0	30.0	30.0	30.0	30.0	30.0
	Nm	0.127	0.147	0.206	0.255	0.314	0.382	0.421	0.529	0.627	0.755	0.755	0.951	1.137	1.362	1.519	1.715	2.058	2.568	2.942	2.942	2.942	2.942	2.942	2.942	2.942

## 60Hz


MODEL	GEAR RATIO	rpm																								
		3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200	250
S6DA□B	kg-cm	1.0	1.3	1.7	2.1	2.6	3.1	3.5	4.4	5.2	6.3	6.3	7.8	9.4	11.3	12.6	14.2	17.0	21.3	25.5	28.4	30.0	30.0	30.0	30.0	30.0
	Nm	0.098	0.127	0.167	0.206	0.255	0.304	0.343	0.431	0.510	0.617	0.617	0.764	0.921	1.107	1.235	1.392	1.666	2.087	2.499	2.783	2.942	2.942	2.942	2.942	2.942

- ◆ The code in □ of gearhead model is for gear ratio.
- ◆ It is the permissible torque of the assembled motor and gearhead.
- ◆ The permissible torque of the motor and inter-decimal gearhead is 30 kg-cm.
- ◆ □ color indicates that the output shaft of the geared motor rotates in the same direction as the output shaft of the motor. Others indicate rotation in the opposite direction.
- ◆ Rpm is based on synchronous speed (50Hz: 1500rpm, 60Hz: 1800rpm) divided by gear ratio. The actual rotation speed can be 2~20% less than displayed value depending on the load.
- ◆ "L" or "H" type does not apply to motors under 40W.

## DIMENSIONS


### ✦ GEARED MOTOR

- MOTOR MODEL : S6I06G□
- HEAD MODEL : S6□A3□~S6□A250□

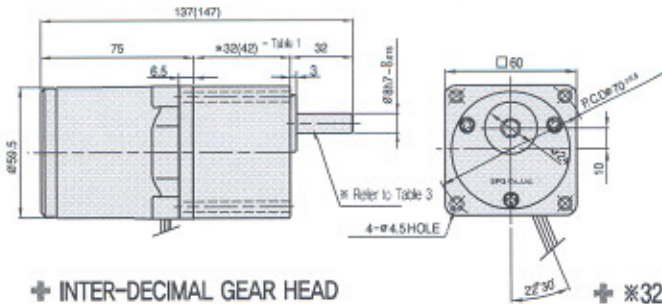

### ✦ INTER-DECIMAL GEAR HEAD

- MODEL : S6GX10B

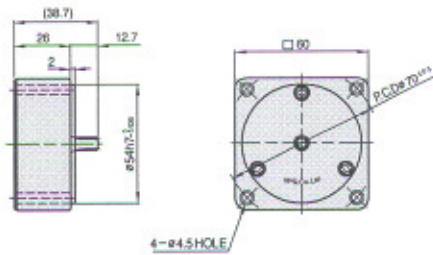

### ✦ ※32(42) - (Table 1)

GEAR RATIO	SIZE(mm)
S6□A3□ ~ S6□A18□	30
S6□A20□ ~ S6□A250□	40

### ✦ WEIGHT - (Table 2)


PART	WEIGHT(kg)	
MOTOR	0.70	
DECIMAL GEAR HEAD	0.18	
GEAR HEAD	S6□A3□ ~ S6□A18□	0.24
	S6□A20□ ~ S6□A40□	0.30
	S6□A50□ ~ S6□A250□	0.33

### ✦ KEY SPEC

GEAR HEAD

### ✦ MOTOR

- MOTOR MODEL : S6I06□□

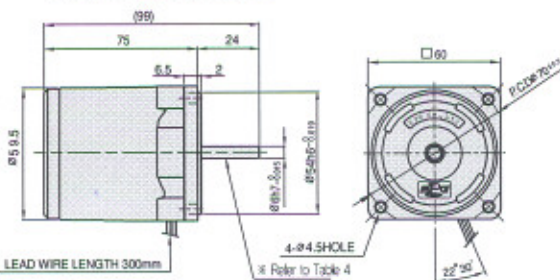

### ✦ SPEC for output shaft of gearhead - (Table 3)


MODEL	TYPES OF OUTPUT SHAFT
STRAIGHT TYPE	
S6SA3□ ~ S6SA250□	
D-CUT TYPE	
S6DA3□ ~ S6DA250□	
KEY TYPE	
S6KA3□ ~ S6KA250□	

### ✦ SPEC for output shaft of motor - (Table 4)

MODEL	TYPES OF OUTPUT SHAFT
GEAR TYPE	
S6I06G□	
STRAIGHT TYPE	
S6I06S□	
D-CUT TYPE	
S6I06D□	

## SCHEMATIC DIAGRAMS

The direction of motor rotation is as viewed from the front shaft end of the motor.

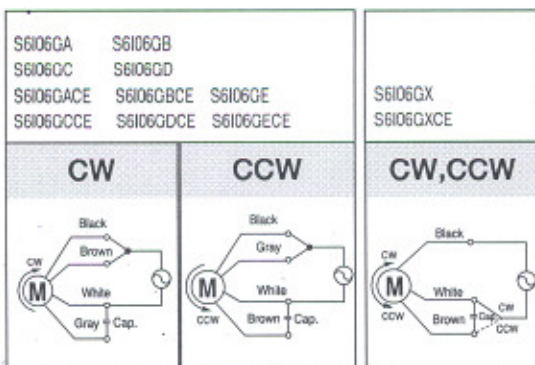

Change the direction of motor rotation only after the motor stops completely. If an attempt is made to change the direction of rotation while the motor is running, the motor may ignore the reversing command or change its direction of rotation after some delay.