





Series P 210

Diameters 10, 16, 25 and 32 mm
 Optional stroke lengths up to 7,000 mm.
 (Longer strokes available on request.)

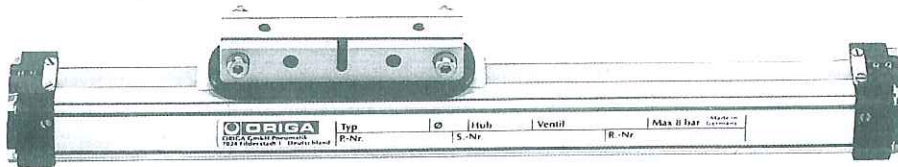

Technical Data

Loads, forces, moments

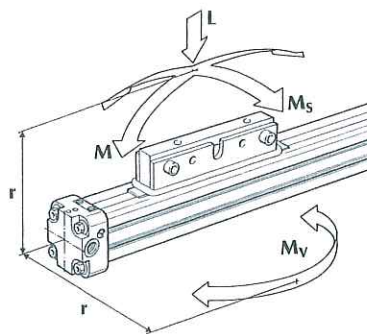

$$M = F \cdot r$$


$$M_s = F \cdot r$$

$$M_v = F \cdot r$$

Cyl. ϕ	Force at 6 bar [N]	Cushion Length [mm]	Max. Allowed Bending Moment [Nm]		Max. Allowed Torque [Nm] M_v	Max. Allowed Load [N] L
			M	M_s		
10	32	2,5	1	0,2	0,3	20
16	78	15	4	0,3	0,5	120
25	250	21	15	1,0	3	300
32	420	26	30	2,0	5	450

Values are based on light shock free duty and should not be exceeded during piston acceleration.
 Side bending moments should be avoided.

Cushioning Diagram

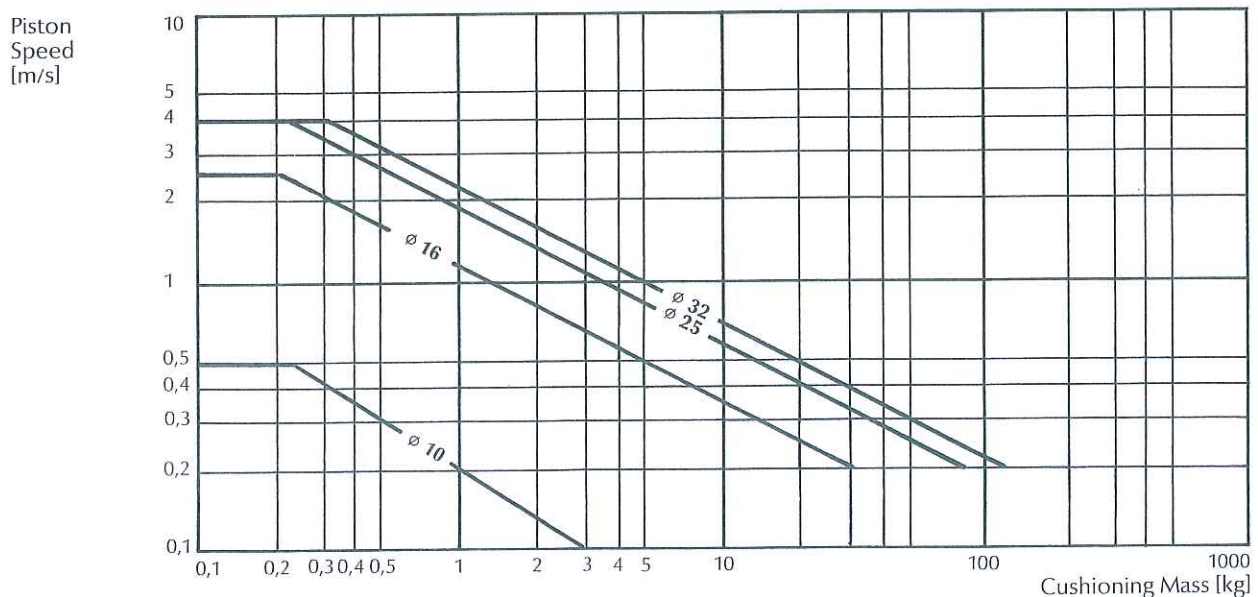


For piston speeds of more than 1 m/s, viton seals are recommended.
 If the approved limits are exceeded additional shock absorbers are advisable.
 For piston speeds of less than 0,1 m/s slow speed lubrication is recommended.
 Maximum seal life will be achieved when piston speeds do not exceed 1 m/s.

Piston Mountings

Standard Piston Mountings

Type P 210/20




Piston mounting No. 20
Anodised aluminium
Mounted during cylinder assembly

Cyl. ϕ	Cylinder weight [kg]		Ident. No.
	for 0 stroke	Increase 100 mm stroke	

10	0,087	0,052	0100
16	0,23	0,095	1000
25	0,80	0,18	2000
32	1,65	0,36	3000

Type P 210/25




Piston mounting No. 25
Galvanised steel
Carrier pin hardened steel for floating connection

10	0,10	0,052	0200
16	0,25	0,095	1200
25	0,90	0,18	2200
32	1,85	0,36	3200

Supplementary Piston Mountings

For Type P 210/20

Aluminium




Piston mounting No. 31
For use with cylinders without sensors

Cyl. ϕ	Weight [kg]	Ident. No.
-------------	-------------	------------

10	-	-
16	0,10	1510
25	0,20	2510
32	0,45	3510

Screws (8.8 galvanized)


Power take off turned by 180° opposite the piston yokes.



Piston mounting No. 34
For use with cylinder sensors both sides


10	-	-
16	0,12	1540
25	0,25	2540
32	0,52	3540

These mountings transfer power to the back of the cylinder and allow an installation method which protects the bands from excessive foreign particles, (sand, welding sparks etc).



Piston mounting No. 35
For use with cylinders without sensors


10	-	-
16	0,12	1550
25	0,35	2550
32	1,20	3550



Piston mounting No. 37
For use with cylinder sensors both sides

10	-	-
16	0,13	1570
25	0,40	2570
32	1,30	3570


Overall Dimensions

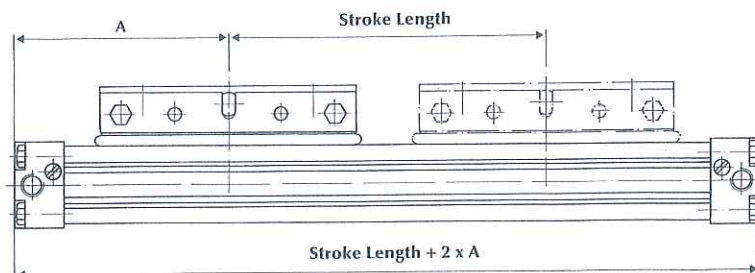




Overall Dimensions

Ø 16-32 mm

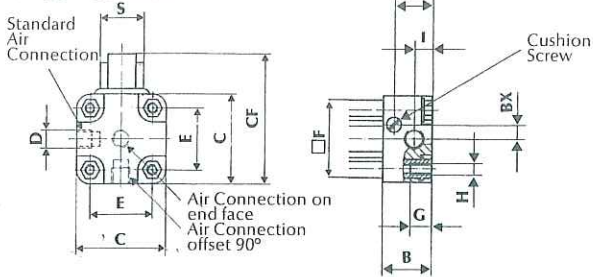


Ø 10 mm

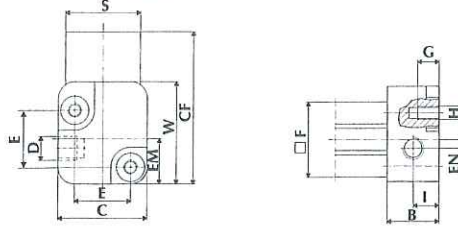


Note: These end cap dimensions change when integrated control valves are used!


Piston Mounting No. 20

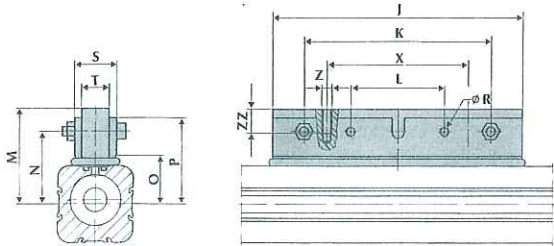


No. 25

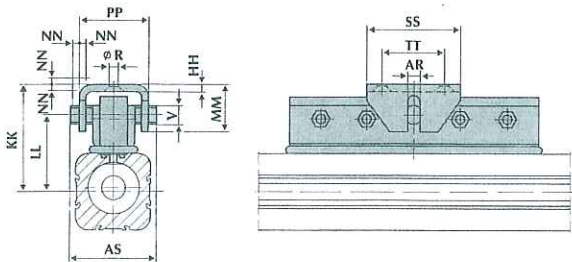



Supplementary Piston Mountings




No. 31




No. 34



No. 35



No. 37




Cyl. Ø	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	R	S	T	V	W	X	Z	AR
10	44,5	12	19	M5	12	17	5	M3	6	60	—	22	22,5	17,5	10,5	21,5	3,4	16	10	3,5	21,5	31	M3	2
16	65	15	27	M5	18	24	5	M3	5,5	76	64	32	30	24	16	29	4,5	18	10	5	—	48	M4	3
25	100	23	40	G1/8	27	36	9	M5	8,5	120	100	50	46	33	24	43	5,5	23	15	8	—	80	M5	5
32	125	27	52	G1/4	36	48	14	M6	10,5	160	120	60	60	46	30	54	7	27	18	12	—	90	M6	8

Cyl. Ø	AS	BE	BG	BJ	BN	BP	BW	BX	CA	CB	CD	CF	EM	EN	HH	KK	LL	MM	NN	PP	SS	TT	YY	ZZ
10	27	—	—	—	—	—	—	—	—	—	—	32	9,5	2	2	26	18,5	11,5	1	24	20	10	—	6
16	28	29	23	18	33	23	12	4	M4	12	16	43,5	—	—	2	34	24,5	13	1,5	25	20	10	34	8
25	42	41,5	31	25	48	34	18	6,5	M6	15	17,6	66	—	—	3	52	38	20	2	37	32	16	47	10
32	55	58	44	33	67	46,5	21,5	9	M8	25	20	86	—	—	4	68	48,5	30	3	44	60	40	56	15

Cylinder Mountings

Cyl. ϕ Weight [kg] Ident No.




End cap mounting No. 4
Galvanised steel
Including screws (8.8 galvanized)

10	0,007	0240
16	0,010	1010
25	0,030	2010
32	0,054	3010

Soley for support of cylinder

Axial forces cannot be transferred







Mid-section support No. 5
Anodised aluminium
For placing in the profiled groove of the cylinder barrel

10	0,001	0250
16	0,002	1020
25	0,013	2020
32	0,022	3020





End cap Mounting No. 4 ϕ 16-32 mm

ϕ 10 mm



Mid-section Support No. 5

Position of Cylinder Mountings



Cyl. ϕ	U	AB	AC	AD	AE	AF	AH	AJ	AK	AN	CL	DG
10	3,6	12	10	14	20,2	11	25,4	33,4	3,5	12	1,6	18,4
16	3,6	18	10	14	12,5	15	32	40	4,5	12	1,6	26
25	5,5	27	16	22	18	22	48	60	6,5	20	2,5	40
32	6,6	36	18	26	20	30	61	73	8,5	20	4	52

End Cap Options

Air Connection in End Cap (see illustration of end cap Page 3.1/3)

Ident-No.

Cylinder ϕ	10	16	25	32
Offset by 90°	-	1851	2751	3751
End face ϕ 16: M 5, ϕ 25: G 1/8, ϕ 32: G 1/4	-	1852	2752	3752

Optional Features

Viton Seals

Ident No.

End cap and piston	-	1772	2771	3771
--------------------	---	------	------	------

Stainless Steel Parts

Ident No.

Screws (V2 A/1541)	3081	1781	2781	3781
Carrier pin and bush for Type P210/25	-	1782	2782	3782

Lubrication

Ident-No.

Grease lubrication for slow speed <0,1 m/s	3091	1691	2791	3791
--	------	------	------	------

Accessories: Electrical VOE or Pneumatic VOP control valves, proximity switch RS or IS
- Please refer to Chapter 4 - Accessories.