


netLINK PROXY

PROFIBUS to PROFINET PROXY in connector format

- 💡 **Integrates a single DP-Slave into PROFINET network**
- 💡 **For direct mounting on DP interface**
- 💡 **Compatible to any PROFIBUS Slave**
- 💡 **Automatic GSDML file generation from GSD file for PROFINET controller configuration**
- 💡 **Works in accordance with PI-organization's proxy guideline**

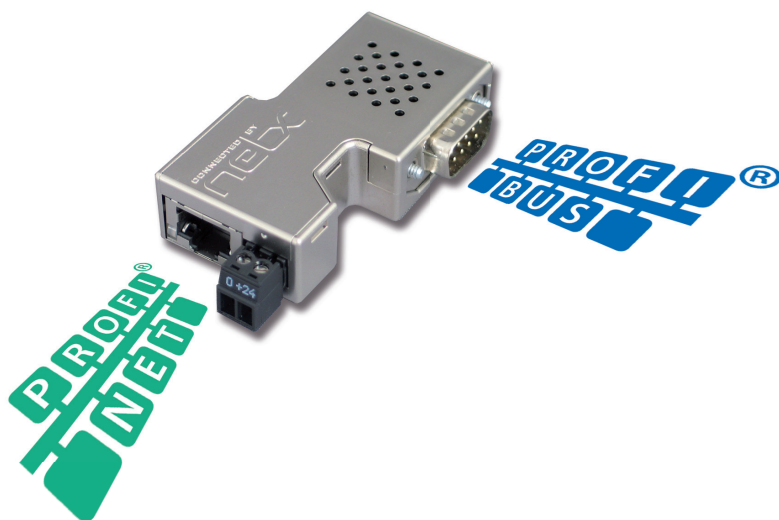

Turning any PROFIBUS slave into PROFINET device

netLINK PROXY integrates a PROFIBUS-DP slave into any superordinate PROFINET network. As connector the device is plugged directly onto the PROFIBUS-DP interface of the DP-Slave and connects to the PROFINET network via its RJ45 socket.

On PROFINET side netLINK behaves like an ordinary IO device. The DP-Slave's process data are mapped in accordance with the present PI-organisation's guideline into the PROFINET slot/subslot addressing model. Commissioning is done via the Ethernet port with either a direct connection to the PC or if already installed and during run time via a PROFINET switch. netLINK PROXY is configured with the FDT/DTM based planning, configuration and diagnostic tool SYCON.net.

With few steps netLINK is getting operative. In case there is no slave GSD file available, a scan function is able to identify the slave on PROFIBUS. After the configuration and the I/O process data length is known, SYCON.net converts the parameters automatically into a standardized GSDML file. This file imports to any PROFINET controller configuration utility and gets netLINK into operation effortless. The netLINK Proxy is supplied by 24 V. During mounting the voltage can be tapped comfortably from the DP-Slave and be led to the 2-pin COMBICON connector. The short distance on PROFIBUS makes a terminator unnecessary.

netLINK PROXY – a cost-efficient and handy alternative to redevelopments to get existing DP devices integrated straightforward into the PROFINET world.

PRODUCT INFORMATION

TECHNICAL DATA

Technical Data

Operating Temperature

±0... +50 °C

Power Supply

+18 ... +30 V / 100mA @ +24V

Dimensions (L x W x H)

65 x 48 x 16 mm

Processor

netX 50

Connectors

Mini-COMBICON 2-polig
RJ45-female connector
DSub 9-pin male connector

Technical Data

Emission

CISPR 11 Class A

Noise Immunity

EN 61131-2:2003

Weight

40 g

LED indicators

SYS, COM, Link, Rx/Tx

Mounting

onto PROFIBUS female connector

Certification

CE Sign

Note: All technical data may be changed without further notice.


Article Overview

NL 51N-DPL

1703.430 | netLINK Proxy Ethernet PROFIBUS-DP-Link

Application

The following illustration shows a typical application of one or more netLINK PROXIES in an automation plant equipped with PROFINET network.

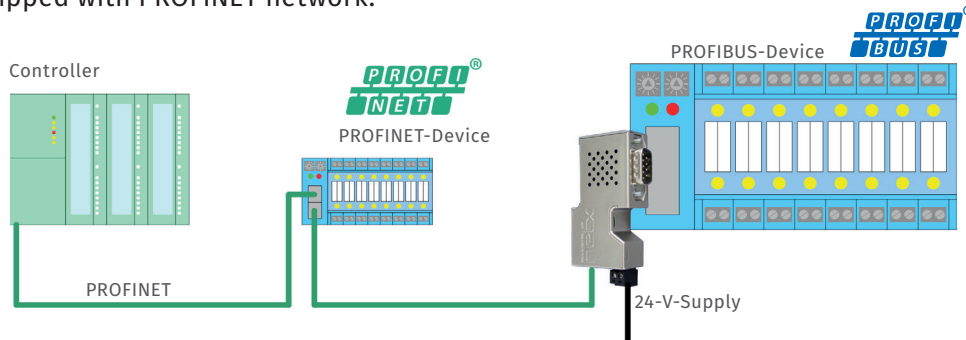

netLINK PROXY is plugged directly onto the PROFIBUS-DP connector of the slave. It is powered by 24 V. The RJ45 PROFINET jack is to be connected to PROFINET. The PROXY is configured via a PC with the configuration tool suite SYCON.net.

The DP-slave configuration data is identified by scan and GSD file. Based on this configuration SYCON.net generates a GSDML file for the PROFINET controller configuration.

Hilscher News:



HEADQUARTERS

Germany
Hilscher Gesellschaft für Systemautomation mbH
Rheinstraße 15
65795 Hattersheim
Phone: +49 (0) 6190 9907-0
Fax: +49 (0) 6190 9907-50
E-Mail: info@hilscher.com
Web: www.hilscher.com

DISTRIBUTORS

More information at www.hilscher.com

SUBSIDIARIES

China
Hilscher Systemautomation (Shanghai) Co. Ltd.
200010 Shanghai
Phone: +86 (0) 21-6355-5161
E-Mail: info@hilscher.cn

France
Hilscher France S.a.r.l.
69800 Saint Priest
Phone: +33 (0) 4 72 37 98 40
E-Mail: info@hilscher.fr

India
Hilscher India Pvt. Ltd.
Pune, Mumbai
Phone: +91- 8888 750 777
E-Mail: info@hilscher.in

Italy
Hilscher Italia S.r.l.
20090 Vimodrone (MI)
Phone: +39 02 25007068
E-Mail: info@hilscher.it

Japan
Hilscher Japan KK
Tokyo, 160-0022
Phone: +81 (0) 3-5362-0521
E-Mail: info@hilscher.jp

Korea
Hilscher Korea Inc.
Seongnam, Gyeonggi, 463-400
Phone: +82 (0) 31-789-3715
E-Mail: info@hilscher.kr

Switzerland
Hilscher Swiss GmbH
4500 Solothurn
Phone: +41 (0) 32 623 6633
E-Mail: info@hilscher.ch

USA
Hilscher North America, Inc.
Lisle, IL 60532
Phone: +1 630-505-5301
E-Mail: info@hilscher.us