


MOTORI TRIFASE ALTEZZA D'ASSE 56 - 132 IM B5, IM B35 SERIE AMPH - TPE - THE - T - BP

PER MOTORI SERIE THE 71 C2 E THE 80 D2, FARE RIFERIMENTO A PAG.78
PER MOTORI SERIE AMPH 132, FARE RIFERIMENTO A PAG.47

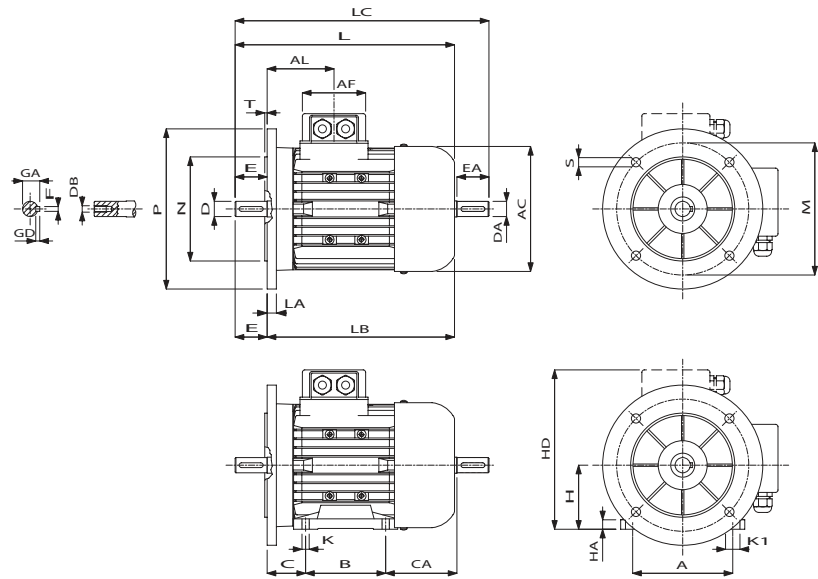

| IEC | M | N | P | T | LA | S | H | A | B | C | K ¹⁾ | CA | HD ²⁾ | AC |
|-------|-----|-----|-----|-----|-----|------|-----|-----|-----|----|-----------------|-------|------------------|-----|
| 56 | 100 | 80 | 120 | 2.5 | 5.5 | 7.0 | 56 | 90 | 71 | 36 | 6 | 65 | 146 | 110 |
| 63 | 115 | 95 | 140 | 3.0 | 10 | 9.5 | 63 | 100 | 80 | 40 | 7 | 72 | 157 | 124 |
| 71 | 130 | 110 | 160 | 3.5 | 10 | 9.5 | 71 | 112 | 90 | 45 | 7 | 86 | 175 | 137 |
| 80 | 165 | 130 | 200 | 3.5 | 12 | 11.5 | 80 | 125 | 100 | 50 | 9 | 85 | 204 | 156 |
| 80* | 165 | 130 | 200 | 3.5 | 12 | 11.5 | 80 | 125 | 100 | 50 | 9 | 116 | 204 | 156 |
| 90S | 165 | 130 | 200 | 3.5 | 12 | 11.5 | 90 | 140 | 100 | 56 | 9 | 98 | 219 | 176 |
| 90L | 165 | 130 | 200 | 3.5 | 12 | 11.5 | 90 | 140 | 125 | 56 | 9 | 98 | 219 | 176 |
| 90L* | 165 | 130 | 200 | 3.5 | 12 | 11.5 | 90 | 140 | 125 | 56 | 9 | 139 | 219 | 176 |
| 100L | 215 | 180 | 250 | 4.0 | 14 | 14.0 | 100 | 160 | 140 | 63 | 12 | 105 | 240 | 195 |
| 100L* | 215 | 180 | 250 | 4.0 | 14 | 14.0 | 100 | 160 | 140 | 63 | 12 | 141 | 240 | 195 |
| 112M | 215 | 180 | 250 | 4.0 | 14 | 14.0 | 112 | 190 | 140 | 70 | 12 | 118 | 263 | 219 |
| 112M* | 215 | 180 | 250 | 4.0 | 14 | 14.0 | 112 | 190 | 140 | 70 | 12 | 155.5 | 263 | 219 |
| 132S | 265 | 230 | 300 | 4.0 | 14 | 14.0 | 132 | 216 | 140 | 89 | 12 | 143 | 309 | 258 |
| 132M | 265 | 230 | 300 | 4.0 | 14 | 14.0 | 132 | 216 | 178 | 89 | 12 | 143 | 309 | 258 |

| IEC | HA | K1 | L | LB | LC | AL | AF | D/DA | E/EA | F/FA | GD | GA/GC | DB ³⁾ |
|-------|----|----|-------|-------|-------|-----|----|------|------|------|----|-------|------------------|
| 56 | 8 | 12 | 188 | 168 | 212 | 62 | 67 | 9 | 20 | 3 | 3 | 10.2 | M4 |
| 63 | 10 | 12 | 214 | 191 | 238 | 66 | 67 | 11 | 23 | 4 | 4 | 12.5 | M4 |
| 71 | 12 | 17 | 250 | 220 | 281 | 74 | 67 | 14 | 30 | 5 | 5 | 16 | M5 |
| 80 | 13 | 18 | 275 | 235 | 315 | 80 | 79 | 19 | 40 | 6 | 6 | 21.5 | M6 |
| 80* | 13 | 18 | 306 | 266 | 348 | 80 | 79 | 19 | 40 | 6 | 6 | 21.5 | M6 |
| 90S | 14 | 18 | 302 | 252 | 354 | 83 | 79 | 24 | 50 | 8 | 8 | 27 | M8 |
| 90L | 14 | 18 | 326 | 276 | 378 | 83 | 79 | 24 | 50 | 8 | 8 | 27 | M8 |
| 90L* | 14 | 18 | 367 | 317 | 419 | 83 | 79 | 24 | 50 | 8 | 8 | 27 | M8 |
| 100L | 14 | 20 | 366 | 306 | 427.5 | 90 | 79 | 28 | 60 | 8 | 8 | 31 | M10 |
| 100L* | 14 | 20 | 402.5 | 342.5 | 465.5 | 90 | 79 | 28 | 60 | 8 | 8 | 31 | M10 |
| 112M | 15 | 21 | 385 | 325 | 448 | 92 | 79 | 28 | 60 | 8 | 8 | 31 | M10 |
| 112M* | 15 | 21 | 400 | 340 | 470.5 | 92 | 79 | 28 | 60 | 8 | 8 | 31 | M10 |
| 132S | 16 | 21 | 449 | 369 | 532 | 117 | 92 | 38 | 80 | 8 | 10 | 41.5 | M12 |
| 132M | 16 | 21 | 487 | 407 | 570 | 117 | 92 | 38 | 80 | 8 | 10 | 41.5 | M12 |

*SOLO SERIE AMPH E TPE

1) Dimensione foro per vite

2) Dimensione massima

3) Foro su uscita asse conforme a DIN 332 parte 2