

Automation Products - u-remote IP20 UR20-FBC-EIP

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com



More performance. Simplified. u-remote.

Weidmüller u-remote – our innovative remote I/O concept with IP 20 which focuses purely on user benefits: tailored planning, faster installation, safer start-up, no more downtime. For considerably improved performance and greater productivity.

Reduce the size of your cabinets with u-remote, thanks to the narrowest modular design on the market and the need for fewer power-feed modules. Our u-remote technology also offers tool-free assembly, while the modular "sandwich" design and integrated web server speed up installation, both in the cabinet and machine. Status LEDs on the channel and each u-remote module enable reliable diagnosis and rapid service.

This and many other amazing ideas boost the availability of your machines and systems. And ensure smooth processes too. From planning to operation.

u-remote stands for "More Performance". Simplified

General ordering data

Type	UR20-FBC-EIP
Order No.	1334920000
Version	Remote I/O fieldbus coupler, IP20, Ethernet, EtherNet/IP
GTIN (EAN)	4050118138160

Automation Products - u-remote IP20 UR20-FBC-EIP

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technische Daten

Dimensions and weights

Width	52 mm	Width (inches)	2.047 inch
Height	120 mm	Height (inches)	4.724 inch
Depth	76 mm	Depth (inches)	2.992 inch
Mounting dimension - height	128 mm	Weight	247 g
Net weight	319 g		

Temperatures

Operating temperature, max.	60 °C	Operating temperature, min.	-20 °C
Storage temperature, max.	85 °C	Storage temperature, min.	-40 °C
Operating temperature	-20 °C ... +60 °C	Storage temperature	-40 °C ... +85 °C

Connection data

Type of connection	PUSH IN	Wire connection cross section, finely stranded, max.	1.5 mm ²
Wire connection cross-section, finely stranded, min.	0.14 mm ²	Wire cross-section, finely stranded, max. (AWG)	AWG 16
Wire cross-section, finely stranded, min. (AWG)	AWG 26	Wire cross-section, solid, max.	1.5 mm ²
Wire cross-section, solid, max. (AWG)	AWG 16	Wire cross-section, solid, min.	0.14 mm ²
Wire cross-section, solid, min. (AWG)	AWG 26		

General data

Air humidity (operation)	10% to 95%, non-condensing as per DIN EN 61131-2	Air humidity (storage)	10% to 95%, non-condensing as per DIN EN 61131-2
Air humidity (transport)	10% to 95%, non-condensing as per DIN EN 61131-2	Air pressure (operation)	≥ 795 hPa (height ≤ 2000 m) as per DIN EN 61131-2
Air pressure (storage)	1013 hPa (height 0 m) to 700 hPa (height 3000 m) as per DIN EN 61131-2	Air pressure (transport)	1013 hPa (height 0 m) to 700 hPa (height 3000 m) as per DIN EN 61131-2
Pollution severity	2	Shock	15 g über 11 ms, halbe Sinuswelle, gem. IEC 60068-2-27
Surge voltage category	II	Test voltage	500 V
UL 94 flammability rating	V-0	Vibration resistance	5 Hz ≤ f ≤ 8.4 Hz: 3.5 mm amplitude as per IEC 60068-2-6, 8.4 Hz ≤ f ≤ 150 Hz: 1 g acceleration as per IEC 60068-2-6

Power supply

Current consumption from I _{IN} (power segment of the field bus coupler), typ.	112 mA	Feed current for I _{IN} (input current path), max.	10 A
Feed current for I _{OUT} (output current path), max.	10 A	Feed current for the system, max.	4 A
Supply voltage	24 V DC +20%/ -15%, via the system bus	Supply voltage for outputs	24 V DC +20%/ -15%
Supply voltage system and inputs	24 V DC +20%/ -15%		

Automation Products - u-remote IP20 UR20-FBC-EIP

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technische Daten

System data

Configuration interface	Micro USB 2.0	Connection type	2 x RJ45 plug-in connectors
Diagnostic data	3,008 Byte	Field bus protocol	EtherNet/IP
Interface	u-remote system bus	Module type	Bus coupler
Parameter data	4 kByte	Process data	988 Byte
Transmission speed of system bus, max.	48 Mbit/s	max. number of modules	64

Classifications

ETIM 5.0	EC001599	ETIM 6.0	EC001603
eClass 6.2	27-24-26-10	eClass 7.1	27-24-26-10
eClass 8.1	27-24-26-10	eClass 9.0	27-24-26-10
eClass 9.1	27-24-26-08		

Product information

Descriptive text ordering data	A termination kit (UR20-EBK-ACC) is included in the coupler package
Descriptive text technical data	Download of EDS-file on www.weidmueller.com
Descriptive text accessories	1 roll = 1000 label = 1 Qty. 1 sheet = 60 label = 1 Qty.

Approvals

Approvals



ROHS	Conform
------	---------

**Automation Products - u-remote IP20
UR20-FBC-EIP**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technische Daten**Downloads**


Approval/Certificate/Document of Conformity	Declaration of Conformity Compass safe distance certificate Lloyds Register certificate DNV/GL certificate ABS certificate RINA certificate
Brochure/Catalogue	CAT U_REMOTE 16/17 EN
Engineering Data	EPLAN, WSCAD, Zuken E3.S
Engineering Data	STEP
Product Change Notification	Release-Notes - EDS Release-Notes - Firmware
Software	Firmware EtherNet/IP Coupler ver. 01.02.01 Firmware EtherNet/IP Coupler ver. 02.03.00 EDS files ver. 1.5 HW1 Firmware EtherNet/IP Coupler ver. 01.03.00 EDS files ver. 1.5 HW2 Archiv Firmware files EtherNet/IP coupler Current Firmware file EtherNet/IP coupler Archiv EDS files EtherNet/IP coupler Current EDS file EtherNet/IP coupler Archiv Firmware files EtherNet/IP coupler HW2 Current Firmware files EtherNet/IP coupler HW2 Archiv EDS files EtherNet/IP coupler HW2 Current EDS file EtherNet/IP coupler HW2
User Documentation	MAN_U-REMOTE_DE MAN_U-REMOTE_EN MAN_UR20_WEBSERVER_DE MAN_UR20_WEBSERVER_EN

**Automation Products - u-remote IP20
UR20-FBC-EIP**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Zeichnungen

Block diagram

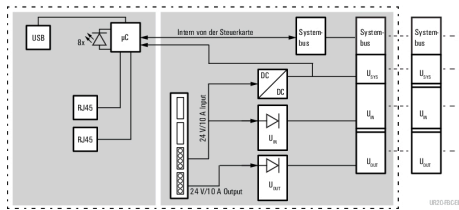

Connection diagram

