



Coating must not have detectable traces of silicone.

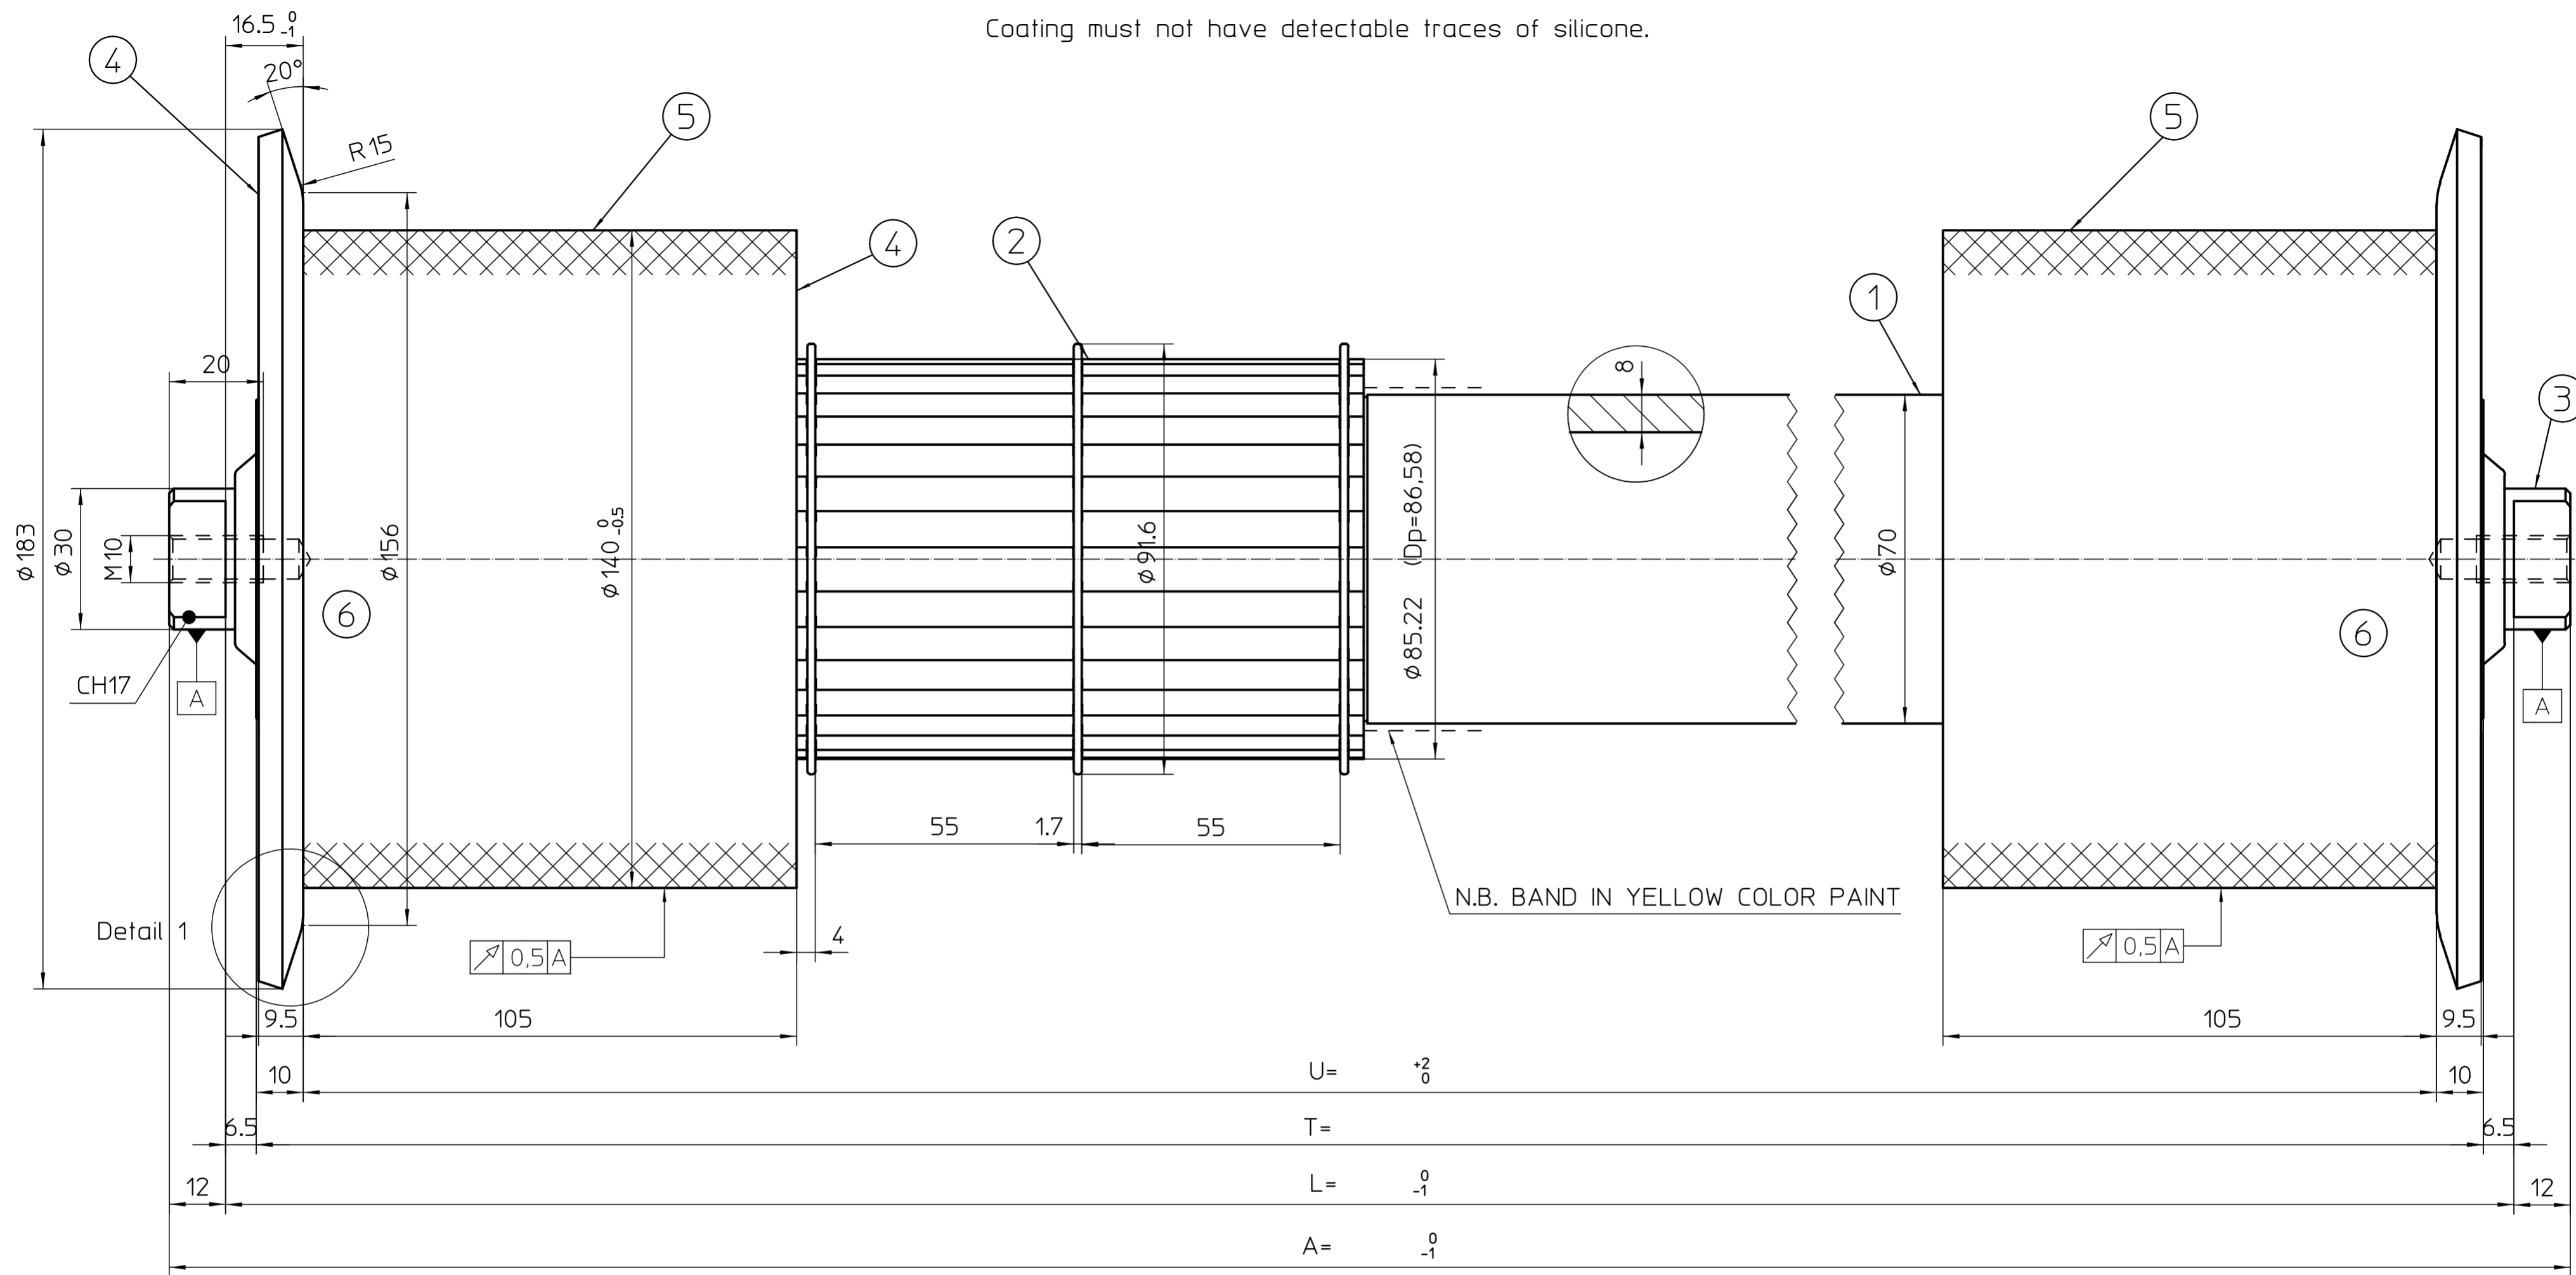


1	Tube dia. 70x8 mm EN 10025-S235 or similar/higher.
2	Pulley Z34 HTD 8M-50 Dp=86.58 De=85.22 EN10025-S235 JRG2 and snap rings SP85 DIN 5417 with rounded edge.
3	Axle dia. 30 mm EN 10025-S235 JRG2 with threaded holes M10x20 and milled ends dim. 17x12 mm.
4	Flange dia. 183x6 (hardened) and flange dia. 112x5 mm made by EN 10111 DD11 or similar/higher.
5	Polyurethane coating hardness 95 +/-3 Shore A.
6	Single row rigid radial precision bearings type 6206-2RS lifetime lubrication and single row cylindrical roller bearings NJ206EC

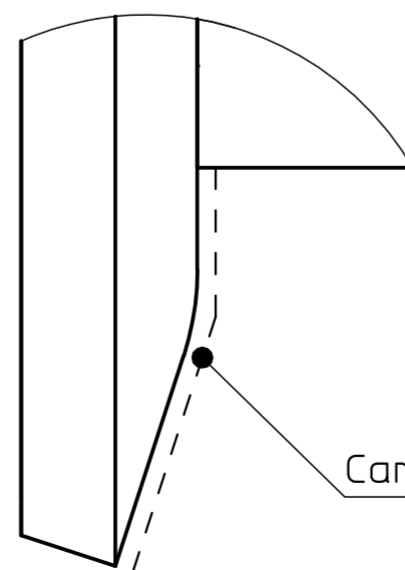

Detail 1
2.5:1

Carbonitriding HRC 50-63

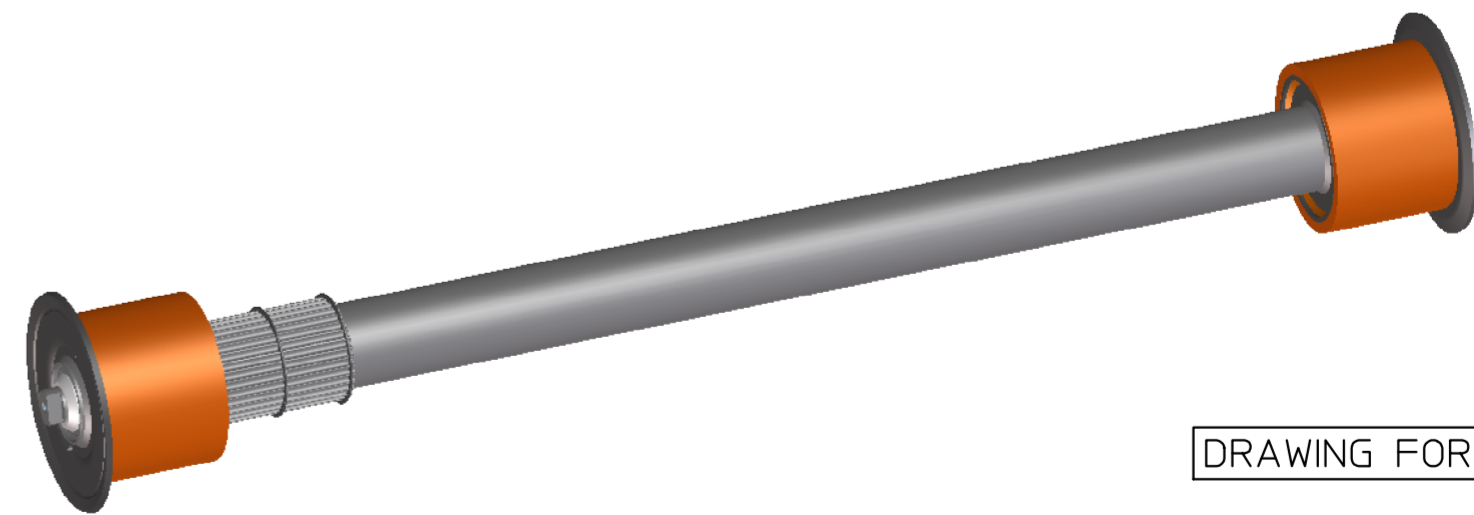

DRAWING FOR CUSTOMER

DESCRIZIONE ULTIMA MODIFICA		ESEGUITA	APPROV.
01	Modifica TY e aggiornamento puleggia.	Pace	Anglieri
DENOMINAZIONE		TOLLERANZE DIM. E FORMA:	
D140/70/30 Z34 HTD8M-50 DRIVEN ROLLER		T268-01-00 T268-03-00	
POLYURETHANE COATED-DE183 HARDENED FLANGES		SALDATURE: -	
MODIFICHE		DATA	SCHEDA N°
DIS. Pace		00	09/02/17
CONTR. Pace		01	21/04/17
DATA 21/04/17		4059	4076
SCALA 1:1		FORM. A2	
PESO -		DIS.N. 329856V	
DUGOMRULLI Moving solutions		SOSTITUISCE -	
VIA INIEVO,8-1-40069 ZOLA PREDOSA (BO)			
TEL.:051/755406-TELEFAX:051/758989			