


- \* To Extend The Life of Contact.
- \* To Quench The Spark of Contact.
- \* To Quench The Noise of Power Line.
- \* To Quench The Surge of Voltage.

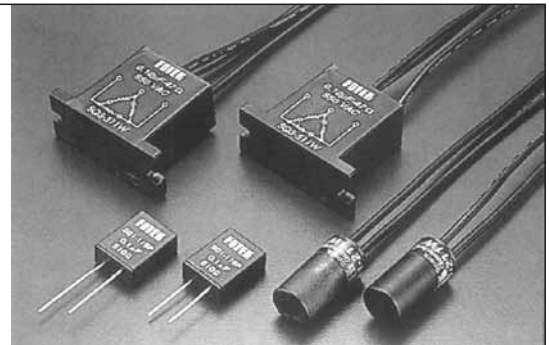

## ■ Specification

Type	Lead Wire Type			PCB Type
Model	SQ1-211W	SQ3-351W	SQ3-511W	SQ1-115P
Phase	Single phase	Three phase		Single phase
Operating Voltage max.	250VAC	300VAC	550VAC	250VAC
Value of Condenser	0.1 $\mu$ F	0.47 $\mu$ F	0.1 $\mu$ F	0.1 $\mu$ F
Value of Resister	100 $\Omega$	100 $\Omega$	100 $\Omega$	510 $\Omega$
Wattage of Resister	2W			
Frequence of Voltage	50 / 60 Hz			
Max. Durated Voltage	750 Vp-p / 1ms	900 Vp-p / 1ms	1500 Vp-p / 1ms	500 Vp-p / 1ms
Isolation Strength	100M $\Omega$ /500VDC			
Dielectric Strength	2.5KVAC / 1min.			
Operating Temp/Hum.	-25 C ~ +70 C ; -35 C ~ +95 C			
Material of Housing	Intensive PBT			
Length of wire	10cm			
Weight	Appr.13g	Appr.35g	Appr.35g	Appr.4.5g

## ■ Guiding of Order

Ex. SQ 3 - 5 5 1 W  
 ① ② ③ ④ ⑤ ⑥

① Product

② Phase


③ Operating Voltage

④ Value of Condenser

⑤ Value of Resister

⑥ Mounting Method

## ■ Application

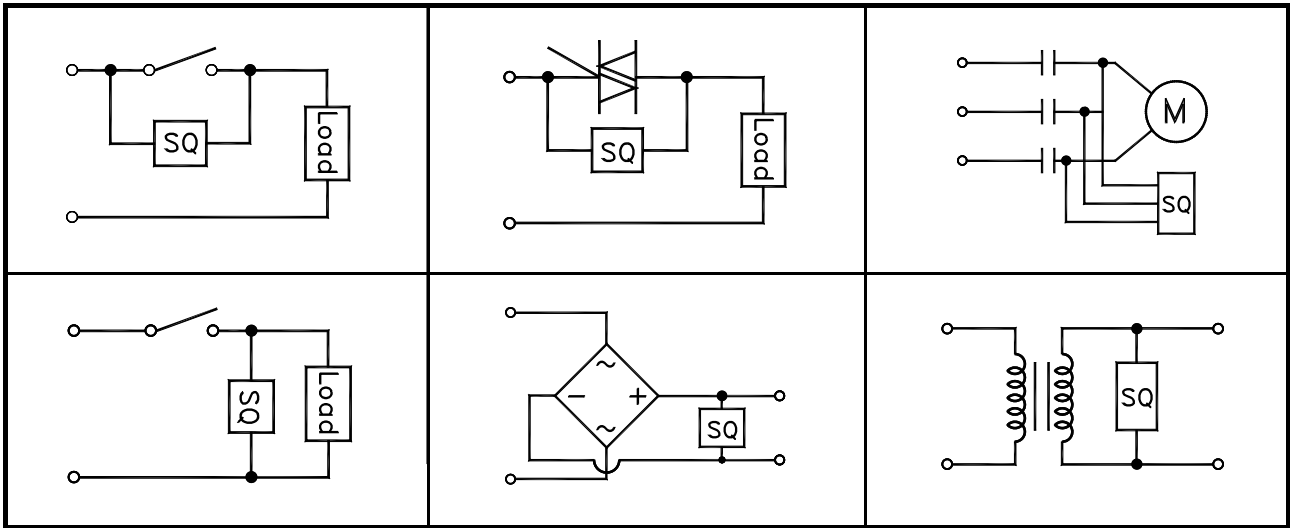

## ■ Dimension

