



Section 10: Lubrication Accessories

General Information • **Fittings** • Grease Guns • Pumps • Used Fluid Handling Equipment
Reels • Compressed Air Components • Centralized Lubrication Systems
Lube Truck • Dollies & Hand Trucks

Couplers

Hydraulic couplers provide quick, positive and leakproof connection with hydraulic fittings. Hydraulic couplers are used with 1/4"-28 taper thread, 1/4"-28 straight, 1/8" PTF, 1/4" PTF, thread-forming, drive, metric, rivet, leakproof, special thread, Monel and stainless steel fittings.

Button head couplers are used with standard or giant button head fittings only.

Pin type couplers provide quick, positive and leakproof connection with pin type fittings.

Flush type couplers are used with flush type fittings only.

Hydraulic Couplers


Product #	Type	Thread	Pressure	Other Features
6304-B	Standard	1/8" NPTF(f)	10,000 psi	N/A
6304-C	Standard	1/8" NPTF(f)	10,000 psi	Equipped with built-in check valve
308730	Narrow	1/8" NPTF(f)	10,000 psi	N/A
308730-A	Narrow	1/8" NPTF(f)	10,000 psi	Equipped with built-in check valve
B330070	Narrow	1/8" NPTF(f)	10,000 psi	High-pressure metal seal, Blister packed
B154	Narrow	1/8" NPTF(f)	7,500 psi	N/A

360° Swivel Hydraulic Couplers *


Product #	Type	Thread	Length	Pressure	Other Features
6509-D	Standard swivel	1/8" NPTF	3-1/2"	10,000 psi	Metal seal
6509-E	Narrow diameter swivel	1/8" NPTF	4"	10,000 psi	Rubber seal



308730-A

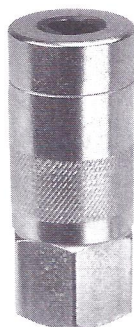

B154

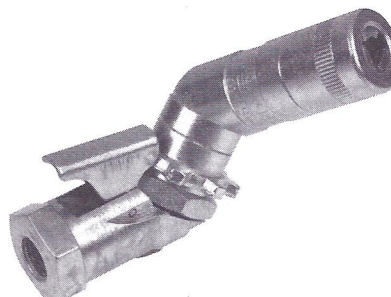

6509-D

IMPORTANT INFORMATION

* Products will lock in eight different positions