



## IEC plug

1 or 2 fuses 5 x 20 mm

High performance compact filter

E-version: suppression of HF interference on earth wire and equipment ground by earth line choke

FN 360, FN 361	Rated current A		Leakage current 220V/50Hz	Inductance		Fuse	Connections		Weight g
	40°C	25°C		mH			Input	Output	
♥ FN 360-1/06	1	1.2	2 x 0.21 mA	7.5	2	2 Ø5x20	IEC 320 C14	soldering lugs/fast-on 6.3 x 0.8	110 X X X X X
♥ FN 360-2/06	2	2.4	2 x 0.21 mA	2	2	2 Ø5x20	IEC 320 C14	soldering lugs/fast-on 6.3 x 0.8	110 X X X X X
♥ FN 360-4/06	4	4.8	2 x 0.21 mA	0.75	2	2 Ø5x20	IEC 320 C14	soldering lugs/fast-on 6.3 x 0.8	110 X X X X X
♥ FN 360-6/06	6	7.3	2 x 0.21 mA	0.45	2	2 Ø5x20	IEC 320 C14	soldering lugs/fast-on 6.3 x 0.8	110 X X X X X
♥ FN 361-1/06	1	1.2	2 x 0.21 mA	7.5	1	1 Ø5x20	IEC 320 C14	soldering lugs/fast-on 6.3 x 0.8	110 X X X X X
♥ FN 361-2/06	2	2.4	2 x 0.21 mA	2	1	1 Ø5x20	IEC 320 C14	soldering lugs/fast-on 6.3 x 0.8	110 X X X X X
♥ FN 361-4/06	4	4.8	2 x 0.21 mA	0.75	1	1 Ø5x20	IEC 320 C14	soldering lugs/fast-on 6.3 x 0.8	110 X X X X X
♥ FN 361-6/06	6	7.3	2 x 0.21 mA	0.45	1	1 Ø5x20	IEC 320 C14	soldering lugs/fast-on 6.3 x 0.8	110 X X X X X

## FN 360E, FN 361E, with earth line choke

♥ FN 360E-1/06	1	1.2	2 x 0.21 mA	7.5	2	2 Ø5x20	IEC 320 C14	soldering lugs/fast-on 6.3 x 0.8	110 X X X X X
♥ FN 360E-2/06	2	2.4	2 x 0.21 mA	2	2	2 Ø5x20	IEC 320 C14	soldering lugs/fast-on 6.3 x 0.8	110 X X X X X
♥ FN 360E-4/06	4	4.8	2 x 0.21 mA	0.75	2	2 Ø5x20	IEC 320 C14	soldering lugs/fast-on 6.3 x 0.8	110 X X X X X
♥ FN 360E-6/06	6	7.3	2 x 0.21 mA	0.45	2	2 Ø5x20	IEC 320 C14	soldering lugs/fast-on 6.3 x 0.8	110 X X X X X
♥ FN 361E-1/06	1	1.2	2 x 0.21 mA	7.5	1	1 Ø5x20	IEC 320 C14	soldering lugs/fast-on 6.3 x 0.8	110 X X X X X
♥ FN 361E-2/06	2	2.4	2 x 0.21 mA	2	1	1 Ø5x20	IEC 320 C14	soldering lugs/fast-on 6.3 x 0.8	110 X X X X X
♥ FN 361E-4/06	4	4.8	2 x 0.21 mA	0.75	1	1 Ø5x20	IEC 320 C14	soldering lugs/fast-on 6.3 x 0.8	110 X X X X X
♥ FN 361E-6/06	6	7.3	2 x 0.21 mA	0.45	1	1 Ø5x20	IEC 320 C14	soldering lugs/fast-on 6.3 x 0.8	110 X X X X X

♥ stock types


FN 360, 361

FN 360E, 361E


X = approved

Operating voltage 250 V max.  
 Operating frequency DC to 400 Hz max.  
 Temperature range - 25°C to + 85°C  
 Test voltage P/N → E 2 kV/50 Hz

For further information, see general part.

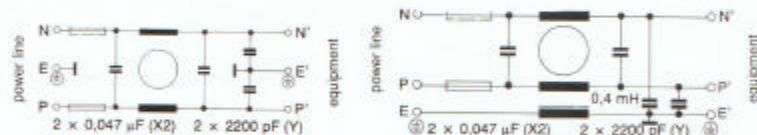

## Insertion loss

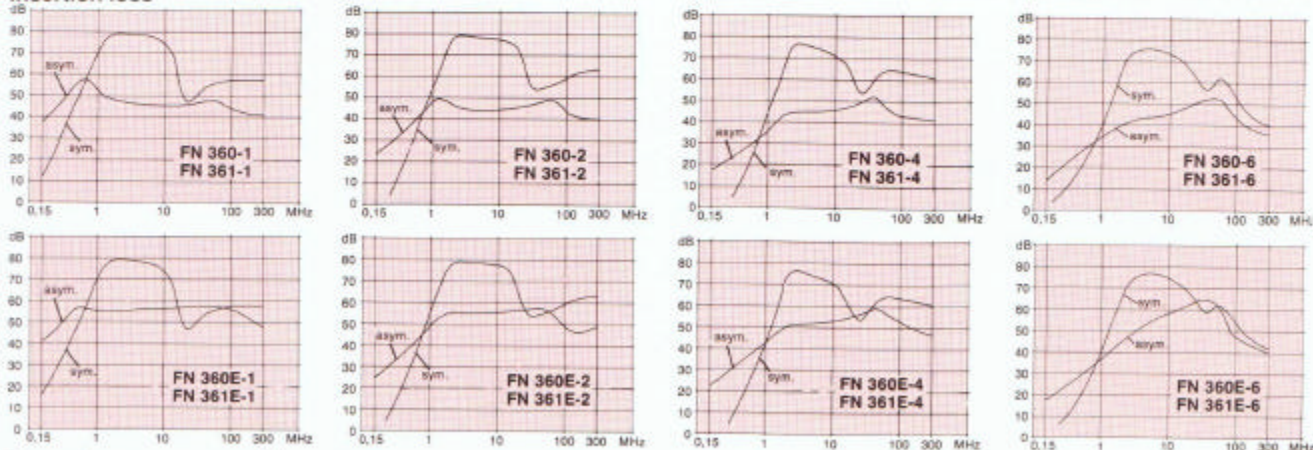

## Dimensions

