

HOSE & ACCESSORIES 1-1/2" HOSE RACK ASSEMBLIES

Model/Series No. 2500 **SERIES**

SPECIFICATIONS

- 1-1/2" Model 2750 Escutcheon
- 1-1/2" Model 2930 Satin Brass Pin Lug Coupling
- 1-1/2" Model 2915 Lined 500 lb. Polyflex Hose (For Interior Standpipe)
- 1-1/2" Model 2962 U/L Satin Brass Fog Nozzle
- 1-1/2" Model 2792 Red Polyester coated Steel U/L &
- ◆FM▶ Hose Rack

- 1-1/2" Model 4070 Rough Brass 300 lb. U/L & ◀FM▶
- 1-1/2" Model 2755 Satin Brass Hose Rack Nipple

MODEL SELECTION

- **2505** 50'
- **2507** 75'
- **2510** 100'

PRODUCT OPTIONS

MOUNTING TYPES:

- WALL BRACKET 1-1/2" Model 4060 Rough □ -E
 - Brass 300 lb. U/L Angle Valve
- □ -G PIPE CLAMP - (For Pipe)
 - 1-1/2" Model 4060 Rough Brass 300 lb. U/L
 - Angle Valve

FINISHES:

- Rack Red Enamel □ -A
 - Valve Rough Brass
 - Trim Polished Brass
- Rack Red Enamel □ -B
 - Valve Polished Brass Trim- Polished Brass
- Rack Polished Chrome Plated □ -C
 - Valve Rough Chrome Plated
 - Trim- Rough Chrome Plated
- □ -D Rack - Polished Chrome Plated
 - Valve Polished Chrome Plated
 - Trim- Polished Chrome Plated















POTTER ROEMER/FIRE PRO

Headquarters: P.O. Box 3527 City of Industry, CA 91744 U.S.A. Los Angeles Area 800-366-3473 626-855-4890

Also in: New York (800) 526-4592 Chicago (800) 547-3473 Atlanta (800) 762-0542 Miami (866) 961-3473 Dallas (866) 644-3473

www.potterroemer.com









PRODUCT OPTIONS (cont.)

EQUIPMENT:

-10 Model 2760 1-1/2" Brass Automatic Drain Valve ☐ -11 Model 2765 Adjustable Brass Pressure


MODEL 2510 (Shown)

- Restricting Device Model 2770 1-1/2" Brass Restricting Disc **-12**
- **-14** Model 4090 1-1/2" Double Female Adjustable Pressure Restricting Angle Valve
- Model 4010 1-1/2" Double Female Pressure **-16** Regulating Angle Valve
- **-18** Model 4042 Double Female Pressure
- Regulating Valve Model 2915 Single Jacket Lined 300 lb. Test **-21**
- Polyflex U/L Labeled Model 2926 Single Jacket Lined 500 lb. Test PR **-23**
- Superflex **-24** Model 2926 Single Jacket Lined 500lb. Test
- PR Superflex U/L Labeled
- **-**31 Model 2935 Rocker Lug Coupling Model 2941 Extruded Aluminum Coupling
- **-**32 **-42** Model 2960 Red Lexan Plastic Fog Nozzle
- Model 2972 Brass Fog Nozzle with Rubber **-43** Bumper
- Model 2980 Red Lexan Plastic "All Fog" Nozzle **-44**
- **-45** Model 2985 Brass "All Fog" Nozzle with Rubber
- **-46** Model 2993 Brass Fixed-Flow Adjustable Nozzle

MODEL DIMENSIONS


Model No.	Hose Length	Valve Size	Hose Dia.	Dimensions			
				Α	В	С	D
2505	50'	1-1/2"	1-1/2"	23-1/2"	22"	18"	4"
2507	75'	1-1/2"	1-1/2"	26"	24-1/2"	18"	4"
2510	100'	1-1/2"	1-1/2"	31"	29-1/2"	18"	4"

NOTE: Add 4" to hose rack assembly dimension "C" for Model 2926 PR-Superflex Hose

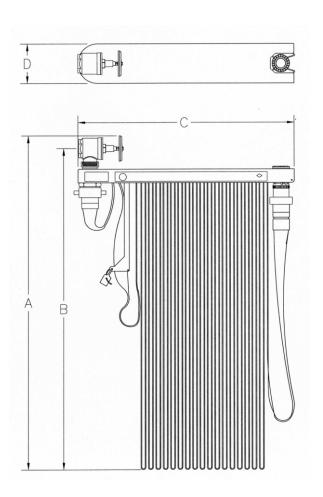



-E WALL BRACKET



-G PIPE CLAMP

Call Potter Roemer - Fire Pro for current listings and approvals. Dimensions are subject to manufacturer's tolerance and may change without notice. Potter Roemer-Fire Pro assumes no responsibility for use of void or superceded data. © Copyright Potter Roemer-Fire Pro, Member of Morris Group International ™ Please visit potterroemer.com for most current specifications.

2500 SERIES

Date: 09/03/15













POTTER ROEMER/FIRE PRO

Headquarters: P.O. Box 3527 City of Industry, CA 91744 U.S.A. Los Angeles Area 800-366-3473 626-855-4890 Also in: New York (800) 526-4592 Chicago (800) 547-3473 Atlanta (800) 762-0542 Miami (866) 961-3473 Dallas (866) 644-3473

www.potterroemer.com