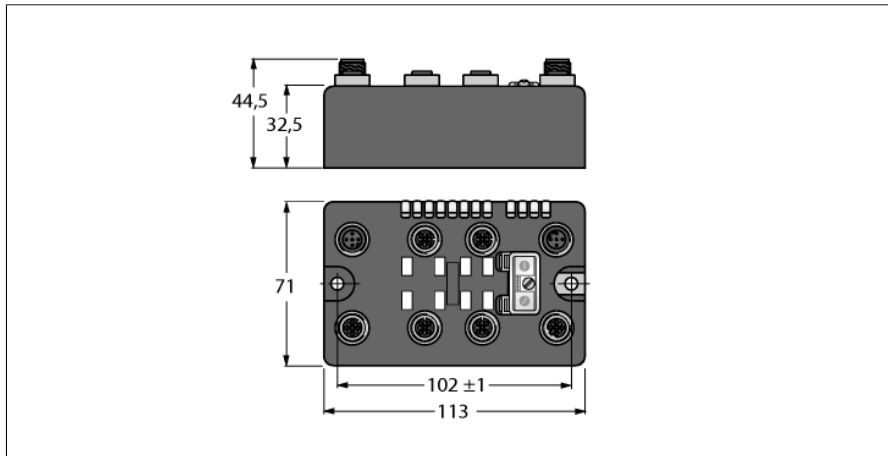


BL compact Multiprotocol Station for Industrial Ethernet
8 Configurable Digital Channels
BLCEN-4M12MT-8XSG-P



- On-Machine™ compact fieldbus I/O blocks
- EtherNet/IP™, Modbus® TCP or PROFINET slave
- Integrated Ethernet switch
- 10 Mbps/100 Mbps supported
- Two 4-pin, D-coded M12 connectors for fieldbus connection
- 2 rotary coding switches for node-address
- IP 69K
- M12 I/O ports
- LEDs indicating status and diagnostics
- Electronics galvanically isolated from the field level via optocouplers
- 8 digital PNP channels, 24 VDC
- Max. 0.5 A per channel
- Adjustable filter times (input delay)
- Input inverting possible

Type designation	BLCEN-4M12MT-8XSG-P
Ident no.	6811452
Nominal system voltage	24 VDC
System power supply	Via auxiliary power
Voltage supply connection	2 x M12, 5-pin
Admissible range Vi	18...30 VDC
Nominal current Vi	225 mA
Max. current Vi	1 A
Admissible range Vo	18...30 VDC
Nominal current Vo	100 mA
Max. current Vo	4 A
Electrical isolation	The 8XSG I/O cards have a common reference potential for operating and load voltage due to their freely selectable digital channels. Subsequently, all voltage sources (VI, VO, V+) present on this device must be concurrently connected to suitable power supplies.
Fieldbus transmission rate	10/100 Mbps
Adjustment transmission rate	Automatic detection
Fieldbus address range	1...92 0 (192.168.1.254) 93 (BootP) 94 (DHCP) 95 (PGM) 96 (PGM-DHCP) *Recommended for PROFINET 97...98 (manufacturer specific)
Fieldbus addressing	2 dec. Rotary coding switches
Fieldbus connection technology	2 x M12 4-pin, D-coded
Protocol detection	automatic
Web server	Integrated
Service interface	Ethernet
Vendor ID	48
Product type	12
Product code	11452
Modbus TCP	
Addressing	Static IP, BOOTP, DHCP
Supported function codes	FC1, FC2, FC3, FC4, FC5, FC6, FC15, FC16, FC23
Number of TCP connections	6
Input Data Size	max. 3 register
Input register start address	0 (0x0000 hex)
Output Data Size	max. 1 register
Output register start address	2048 (0x0800 hex)

BL compact Multiprotocol Station for Industrial Ethernet
8 Configurable Digital Channels
BLCEN-4M12MT-8XSG-P

Ethernet/IP

Addressing	acc. to EtherNet/IP specification
Device Level Ring (DLR)	supported
Class 1 connections (CIP)	6
Input Assembly Instance	103
Input Data Size	3 INT
Output Assembly Instance	104
Output Data Size	1 INT
Configuration Assembly Instance	106
Configuration Size	0
Comm Format	Data - INT

PROFINET

Addressing	DCP
Conformance class	B (RT)
MinCycleTime	1 ms
Diagnostics	acc. to PROFINET alarm handling
Topology detection	supported
Automatic addressing	supported
Media Redundancy Protocol (MRP)	supported
Input Data Size	max. 2 BYTE
Output Data Size	max. 2 BYTE

Digital inputs

	from 8XSG
Input type	PNP
Type of input diagnostics	Group diagnostics
Sensor supply (V_{SENS})	24 VDC from supply voltage
Low level signal voltage	< 4.5 VDC
High level signal voltage	7...30 VDC
Low level signal current	< 1.5 mA
High level signal current	2.1 ... 3.7 mA
Input delay	0.25 or 2.5 (configurable) ms

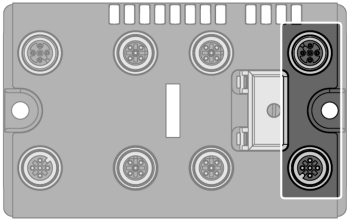
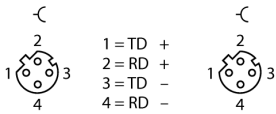
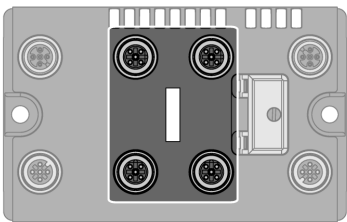

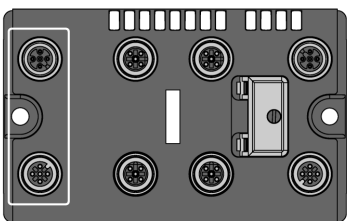
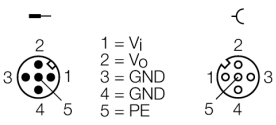
Digital outputs

	from 8XSG
Output type	PNP
Sensor supply (V_{SENS})	24 VDC from supply voltage
Output current per channel	0.5 A
Output voltage	24 VDC from supply voltage
Output delay	3 ms
Load type	Resistive, inductive, lamp load
Load resistance, resistive	> 48 Ω
Load resistance, inductive	< 1.2 H
Lamp load	< 3 W
Switching frequency, resistive	< 200 Hz
Switching frequency, inductive	< 2 Hz
Switching frequency, lamp load	< 20 Hz
Short-circuit protection	yes

Dimensions

Mounting	113 x 71 x 32.5 mm
Weight	2 x 5.4 mm diameter holes, 1.7 Nm torque
Housing material	390 \pm 20 g
Housing color	Glass fiber reinforced nylon, nickel-plated connector
Material screw	Black
Material label	Nickel-plated brass
Ground label material	Polyester with polycarbonate overlay
Protection class	Nickel-plated brass
	IP67
	IP69K
Ambient temperature	-40...+70 °C
Storage temperature	-40...+85 °C
Relative humidity	15...95 %, non-condensing
Vibration test	Acc. to IEC 61131-2
- up to 20 g (at 10 up to 150 Hz)	For mounting on base plate or machinery
Shock test	acc. to IEC 61131-2
Electromagnetic compatibility	acc. to IEC 61131-2
MTTF	134 years
MTTF note	acc. to SN 29500 (Ed. 99) 20 °C
Approvals and certificates	CE, cULus, Class I Div.2

BL compact Multiprotocol Station for Industrial Ethernet
8 Configurable Digital Channels
BLCEN-4M12MT-8XSG-P

	<p>Ethernet Fieldbus cable (IP67 example): RSSD RSSD 441-2M ID number U-02482 or RSSD-RSSD-441-2M/S2174 ID number 6914218</p>	<p>Pin assignment (M12, D-coded)</p> 
	<p>Digital Inputs and Outputs Extension cable (example): RK 4.4T-2-RS 4.4T ident-no. U2445 or RKC4.4T-2-RSC4.4T/TEL ident-no. 6625208</p>	<p>Pin Assignment</p> 
	<p>Auxiliary Power Extension cable (example): RKC 4.4T-2-RSC 4.4T ident-no. U5264 or RKC4.4T-2-RSC4.4T/TEL ident-no. 6625208</p>	<p>Pin Assignment</p> 

BL compact Multiprotocol Station for Industrial Ethernet
8 Configurable Digital Channels
BLCEN-4M12MT-8XSG-P**Status: Station LED**

LED	Color	Status	Description
IOs		OFF	Power off
	RED	ON	Insufficient power supply
	RED	FLASHING (1Hz)	Deviating station configuration
	RED	FLASHING (4 Hz)	No module bus communication
	GREEN	ON	Station OK
	GREEN	FLASHING	Force mode active
BUS		OFF	Power Off
	GREEN	ON	Connected to Master
	GREEN	FLASHING	Ready
	RED	ON	Error
	RED	FLASHING	WINK
	YELLOW	ON	DHCP/BOOTP Search
IO	GREEN	ON	I/O slots OK
	GREEN	FLASHING (1Hz)	At least one I/O slot in idle state
	RED	ON	At least one faulty I/O slot
	RED	FLASHING	At least one I/O slot in faulty state

Status: I/O LED

LED	Color	Status	Description
D *		OFF	Diagnostic disabled
	RED	ON	Station / module bus communication failure
	RED	FLASHING (0.5Hz)	Summarized diagnostic
XSG channels 0...7		OFF	Status channel x = 0 (OFF), diagnostic disabled
	GREEN	ON	Status channel = 1 (ON)
	RED	ON	Short-circuit at output

* D LED also indicates gateway diagnostic

BL compact Multiprotocol Station for Industrial Ethernet
8 Configurable Digital Channels
BLCEN-4M12MT-8XSG-P

Process Data Mapping of the Single Protocols

EtherNet/IP™ I/O and Diagnostic Data Mapping

INPUT	BYTE	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	DI 1 ₇	DI 1 ₆	DI 1 ₅	DI 1 ₄	DI 1 ₃	DI 1 ₂	DI 1 ₁	DI 1 ₀
	1	-	-	-	-	-	-	-	-
	2	-	-	-	-	-	-	-	-
	3	-	-	-	-	-	-	-	-
	4	-	-	-	-	-	-	-	-
	5	-	-	-	-	-	-	-	-
OUTPUT	BYTE	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	DO 1 ₇	DO 1 ₆	DO 1 ₅	DO 1 ₄	DO 1 ₃	DO 1 ₂	DO 1 ₁	DO 1 ₀
	1	-	-	-	-	-	-	-	-

Legend:

CFG	Configuration Error	FCE	Force Mode Active
COM	Communication Error	SC	Short Circuit/Overcurrent
DIA	Diagnostics Active	VI	VI Voltage
DI	Digital Input	VO	VO Voltage
DO	Digital Output		

Modbus TCP Register Mapping


	REG	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Eingänge (RO)	0x0000	-	-	-	-	-	-	-	-	DI 1 ₇	DI 1 ₆	DI 1 ₅	DI 1 ₄	DI 1 ₃	DI 1 ₂	DI 1 ₁	DI 1 ₀
Status (RO)	0x0001	-	FCE	-	-	CFG	COM	VI low	-	VO low	-	-	-	-	-	-	DIA
Diag. (RO)	0x0002	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	S1 DIA
Ausgänge (RW)	0x0800	-	-	-	-	-	-	-	-	DO 1 ₇	DO 1 ₆	DO 1 ₅	DO 1 ₄	DO 1 ₃	DO 1 ₂	DO 1 ₁	DO 1 ₀
I/O Diag (RO)	0xA000	SCDO 1 ₇	SCDO 1 ₆	SCDO 1 ₅	SCDO 1 ₄	SCDO 1 ₃	SCDO 1 ₂	SCDO 1 ₁	SCDO 1 ₀	SCDI 1 ₇	SCDI 1 ₆	SCDI 1 ₅	SCDI 1 ₄	SCDI 1 ₃	SCDI 1 ₂	SCDI 1 ₁	SCDI 1 ₀

PROFINET® Process Data

	BYTE	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Eingänge	0	DI 1 ₇	DI 1 ₆	DI 1 ₅	DI 1 ₄	DI 1 ₃	DI 1 ₂	DI 1 ₁	DI 1 ₀
	1	-	-	-	-	-	-	-	-
Ausgänge	0	DO 1 ₇	DO 1 ₆	DO 1 ₅	DO 1 ₄	DO 1 ₃	DO 1 ₂	DO 1 ₁	DO 1 ₀
	1	-	-	-	-	-	-	-	-

BL compact Multiprotocol Station for Industrial Ethernet
8 Configurable Digital Channels
BLCEN-4M12MT-8XSG-P

Accessories

Type code	Ident no.		Dimension drawing
LOCK-EURO-C	A0885	Locking guard for straight eurofast™ C-body connectors (RKC, RKCV, RSC, RSCV) in a Class I, Division 2 installations	
LOCK-EURO-C (10/BAG)	A0886	Locking guard for straight eurofast™ C-body connectors (RKC, RKCV, RSC, RSCV) in a Class I, Division 2 installations	