




THLZ 500-1250 - Backward Curved	Application	Inlet Type
	HVAC Applications	Double Inlet - Double Width

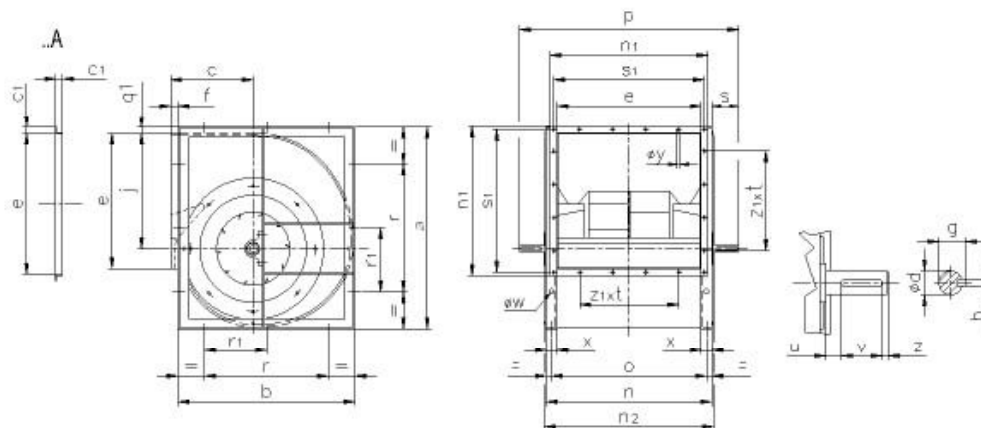

Selected Fan THLZ 800 T

Dimensions mm


a	1468	n	1107	v	80
b	1174	n1	1057	z	10
c	540	n2	1137	x	50
cl	25	o	1067	øy	7,5
ød	50	p	1367	q1	7
e	1007	r	710	øw	18
f	81	r1	355	z1	11x90
g	53,5	s	130		
h	14	s1	1037		
j	864	u	22		

Discharge Position
 LG 0°
 LG 90°
 LG 180°
 LG 270°
 RD 0°
 RD 90°
 RD 180°
 RD 270°



Freitag, 29. Juli 2011
Aeolus Plus 1.0.6

HLZ 500-1250 - Rückwärtsgekrümmte Schaufel	Anwendung Klimaventilatoren	Ansaugtyp Zweiseitig saugend
---	---------------------------------------	--

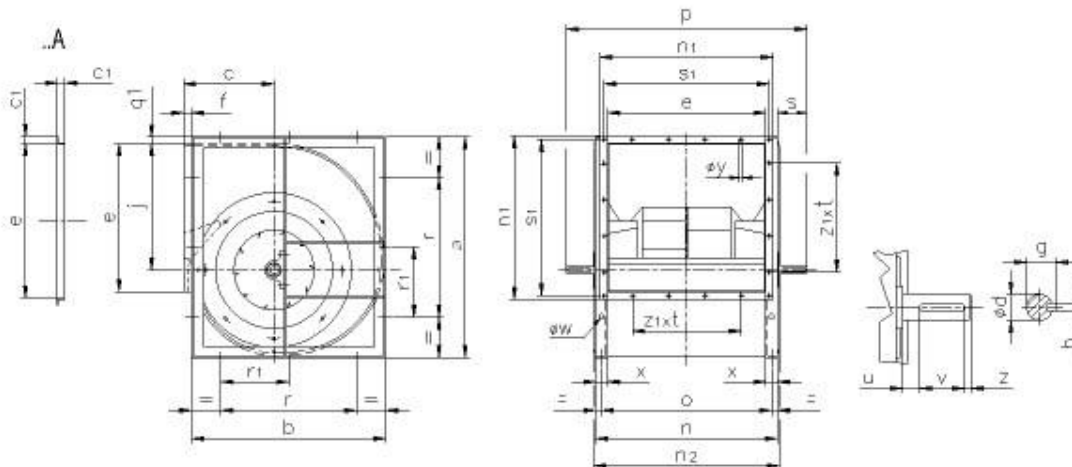

Gewählter Vent. HLZ 800 T

Anteil mm

a	1468	n	1107	v	90
b	1174	n1	1057	z	10
c	540	n2	1137	x	50
c1	25	o	1067	øy	7,5
ød	60	p	1445	q1	7
e	1007	r	710	øw	18
f	81	r1	355	z1	11x90
g	64	s	169		
h	18	s1	1037		
j	864	u	24		

Gehäusestellung

- LG 0°
- LG 90°
- LG 180°
- LG 270°
- RD 0°
- RD 90°
- RD 180°
- RD 270°