


Coalescing Filter Numbering System

 = "Most Popular"

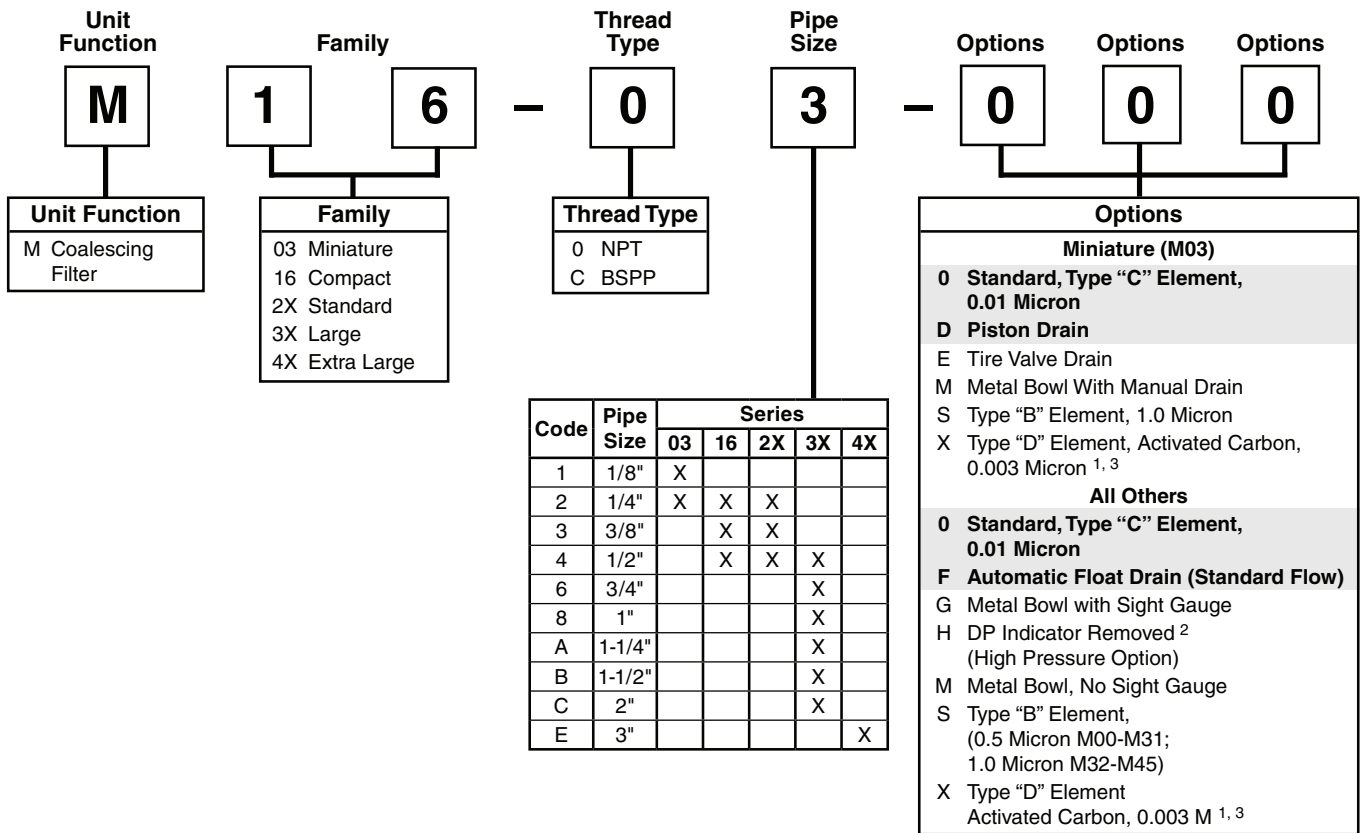

B

Filters, Regulators, Lubricators

¹ Auto Float Drains not available with M16, M26- units with Type "D" Activated Carbon Elements.

² Except Models M5X.

³ Units with Type "D" element do not contain DP indicator.

"M" Series Coalescing Filters, with Type "B" 0.5 micron elements: All Wilkerson Type "M" Oil Removal (Coalescing) Filters with Type "B" 0.5 micron elements **exceed ISO Class 2** for maximum particle size and concentration of solid contaminants, and exceed Class 3 on maximum oil content (ppm/wt).

"M" Series Coalescing Filters, with Type "C" 0.01 micron elements: All Wilkerson Type "M" Oil Removal (Coalescing) Filters with Type "C" 0.01 micron elements **exceed ISO Class 1** for maximum particle size and concentration of solid contaminants, and exceed Class 1 on maximum oil content (ppm/wt).

"M" Series Adsorption Filters, with Type "D" activated carbon elements: All Wilkerson Type "M" adsorption filters with Type "D" activated carbon elements **exceed ISO Class 1** on maximum oil content (ppm/wt).

NOTE: All classes above refer to International Standards Organization (ISO) standard 8573-1:1991(E), pertaining to maximum particle size and concentration of solid contaminants, and maximum oil content.

If more than one option is desired, arrange them in alphabetical order in positions 6, 7, and 8.


NOTE: 000 in position 6, 7, and 8 signifies standard product.

Coalescing Filter M26

= "Most Popular"

B

Filters, Regulators, Lubricators



M26-02-000

Features

- Manual Drain
- 0.01 Micron Rated Filter Element
- Quick-disconnect Bowl Guard with Integral Plastic Bowl and Safety Latch
- Differential Pressure Indicator

Specifications

Flow Capacity*	1/4	55.0 SCFM (25.9 dm ³ /s)
	3/8	65.5 SCFM (30.9 dm ³ /s)
	1/2	79.5 SCFM (37.5 dm ³ /s)
Maximum Supply Pressure	Plastic Bowl	150 PSIG (10.3 bar)
	Metal Bowl	200 PSIG (13.8 bar)
Operating Temperature	Plastic Bowl	32° to 125°F (0° to 52°C)
	Metal Bowl	32° to 150°F (0° to 65.5°C)
Standard Filtration	Micron	(B) 0.5, (C) 0.01 (D) 0.003 ppm / wt**
Port Size	NPT / BSPP-G	1/4, 3/8, 1/2
Weight		2.4 lb. (1.1 kg)

* Inlet pressure 150 PSIG (10.3 bar). Pressure drop of 3 PSID (0.2 bar).

** Filtration temperature of 70°F (21°C) @100 PSIG (6.9 bar) with typical compressor lubricating oil and protected by Type "C" filter.


"M" Series Coalescing Filters, with Type "B" 0.5 micron elements: All Wilkerson Type "M" Oil Removal (Coalescing) Filters with Type "B" 0.5 micron elements **exceed ISO Class 2** for maximum particle size and concentration of solid contaminants, and exceed Class 3 on maximum oil content (ppm/wt).

"M" Series Coalescing Filters, with Type "C" 0.01 micron elements: All Wilkerson Type "M" Oil Removal (Coalescing) Filters with Type "C" 0.01 micron elements **exceed ISO Class 1** for maximum particle size and concentration of solid contaminants, and exceed Class 1 on maximum oil content (ppm/wt).

"M" Series Adsorption Filters, with Type "D" 0.003 micron activated carbon elements: All Wilkerson Type "M" adsorption filters with Type "D" 0.003 micron activated carbon elements **exceed ISO Class 1** on maximum oil content (ppm/wt).

Materials of Construction

Body		Zinc
Bowls	Plastic Bowl	Polycarbonate
	Metal Bowl	Zinc
Element Retainer		Brass Stud
Filter Elements	Type "B", "C"	Borosilicate Cloth
	Type "D"	Activated Carbon
Seals		Fluorocarbon

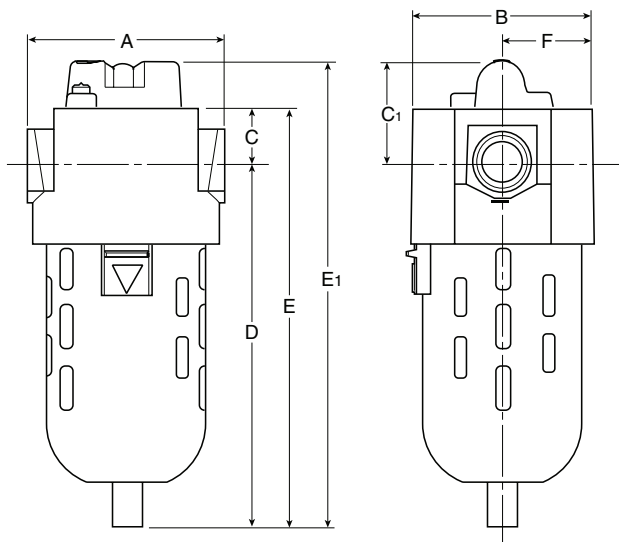

Dimensions

Models	Inches (mm)	A	B	C	C ₁	D	E	E ₁	F
Standard Unit M26-XX-000		3.30 (84)	3.00 (76)	1.00 (25.4)	1.83 (46.5)	6.40 (162.6)	7.40 (188)	8.23 (209)	1.50 (38)
Automatic Drain M26-XX-F00		3.30 (84)	3.00 (76)	1.00 (25.4)	1.83 (46.5)	6.54 (166)	7.54 (191.5)	8.37 (212.5)	1.50 (38)

Replacement Bowl Kits

- Metal Bowl –
 Manual Drain GRP-95-930
 Auto Drain..... GRP-95-960
- Plastic Bowl –
 Manual Drain GRP-95-929
 Bowl Guard, Manual Drain..... GRP-95-935
 Bowl Guard, Auto Drain GRP-95-948


Replacement Element Kits

- Type “B”, 0.5 Micron..... MSP-95-989
 Type “C”, 0.01 Micron..... MTP-95-549
 Type “D”, Oil Vapor Removing..... MXP-95-540

Accessories



- Automatic Mechanical Drain..... GRP-95-973
 Cap, Differential Pressure Indicator –
 For pressures over 150 PSIG..... GRP-95-020
 Differential Pressure Indicator DP2-02-000
 Manual Flex-Tip..... FRP-95-610
 Sight Gauge Kit..... GRP-95-079
 Wall Mounting Bracket, L-Type GPA-95-946

 = “Most Popular”

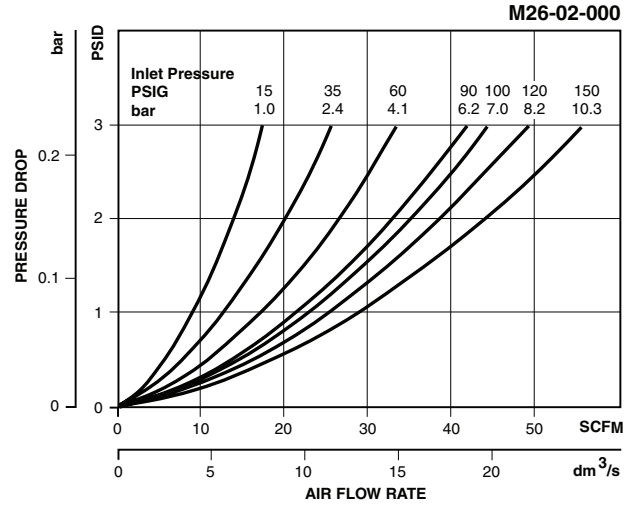

B

Filters, Regulators, Lubricators

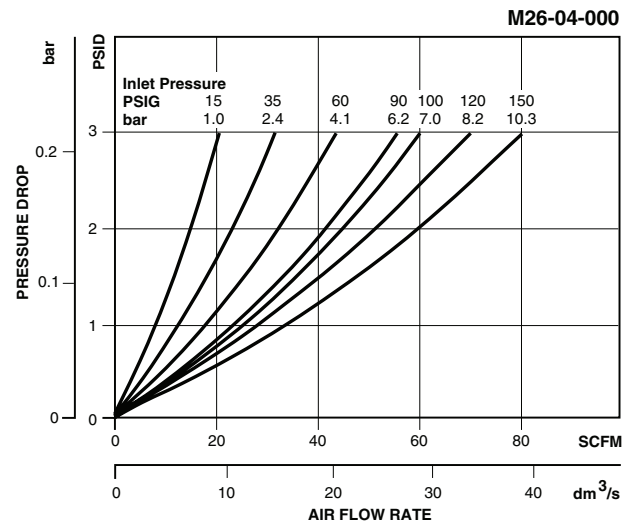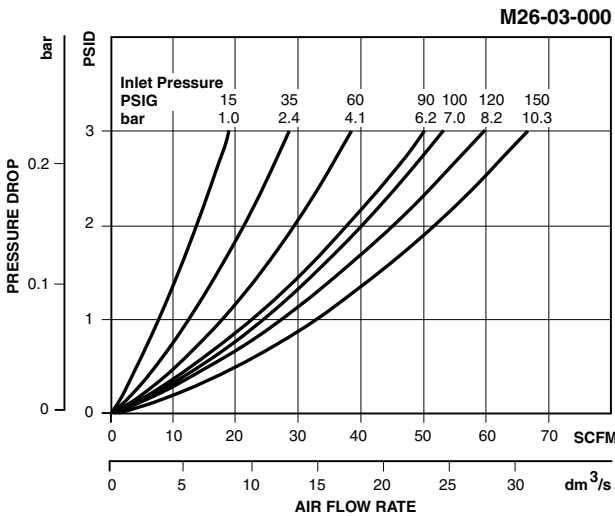

Ordering Information

Model Type	Port Size	Polycarbonate Bowl / Bowl Guard / “C” Element	Metal Bowl / “C” Element	Polycarbonate Bowl / Bowl Guard / “B” Element	Polycarbonate Bowl / Bowl Guard / “D” Element (No DPI)
Manual Drain	1/4	M26-02-000	M26-02-M00	M26-02-S00	M26-02-X00
	3/8	M26-03-000	M26-03-M00	M26-03-S00	M26-03-X00
	1/2	M26-04-000	M26-04-M00	M26-04-S00	M26-04-X00
Automatic Drain	1/4	M26-02-F00	M26-02-FM0	M26-02-FS0	—
	3/8	M26-03-F00	M26-03-FM0	M26-03-FS0	—
	1/2	M26-04-F00	M26-04-FM0	M26-04-FS0	—

Options - To order an option supplied with the unit model, add the appropriate coded suffix letter in the designated position of the model number.