



Smart Line: float Ø26x230

Type 35615/XX

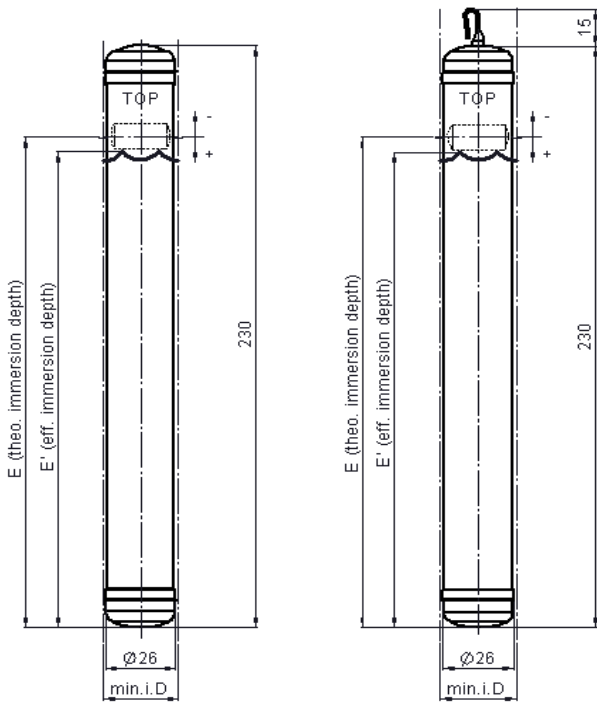


order reference
35615/05 (< 5 bar@20 °C)

order reference ²⁾
35615/15 (H 15 bar@20 °C) ¹⁾
35615/30 (H 30 bar@20 °C) ¹⁾
35615/40 (H 40 bar@20 °C) ¹⁾
35615/60 (H 60 bar@20 °C) ¹⁾

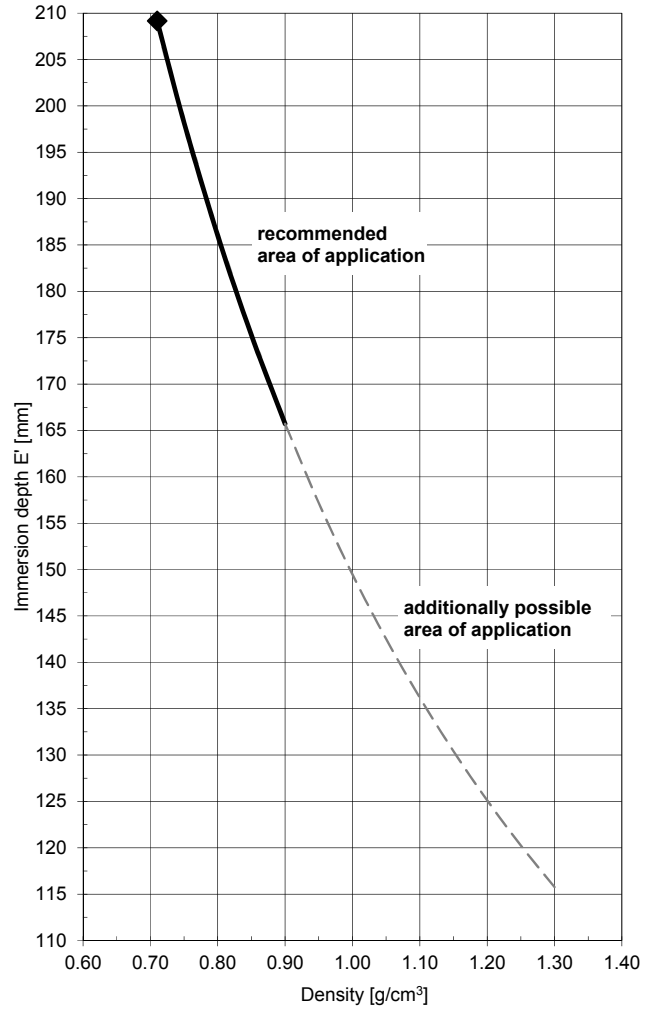

technical details

material 316L
max. operating pressure ¹⁾ 5; 15; 30; 40; 60 bar@20 °C
max. test pressure ¹⁾ 5; 15; 30; 40; 60 bar@20 °C
min. density 0.71 g/cm³
pipe min. ID 28/32 mm
theo. immersion depth E 205.0 mm
eff. immersion depth E' see diagram

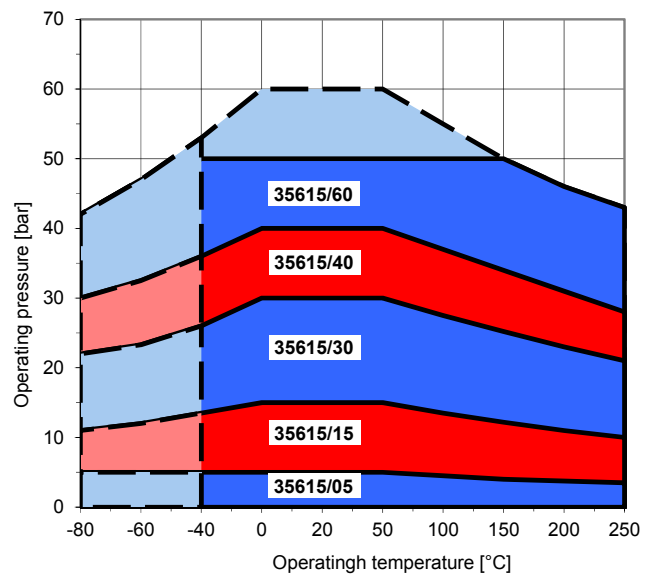

commentary

¹⁾ corresponds max. operating/test pressure in bar
²⁾ 35615/15; 30; 40 und 60 = preload pressure in bar