


外觀圖



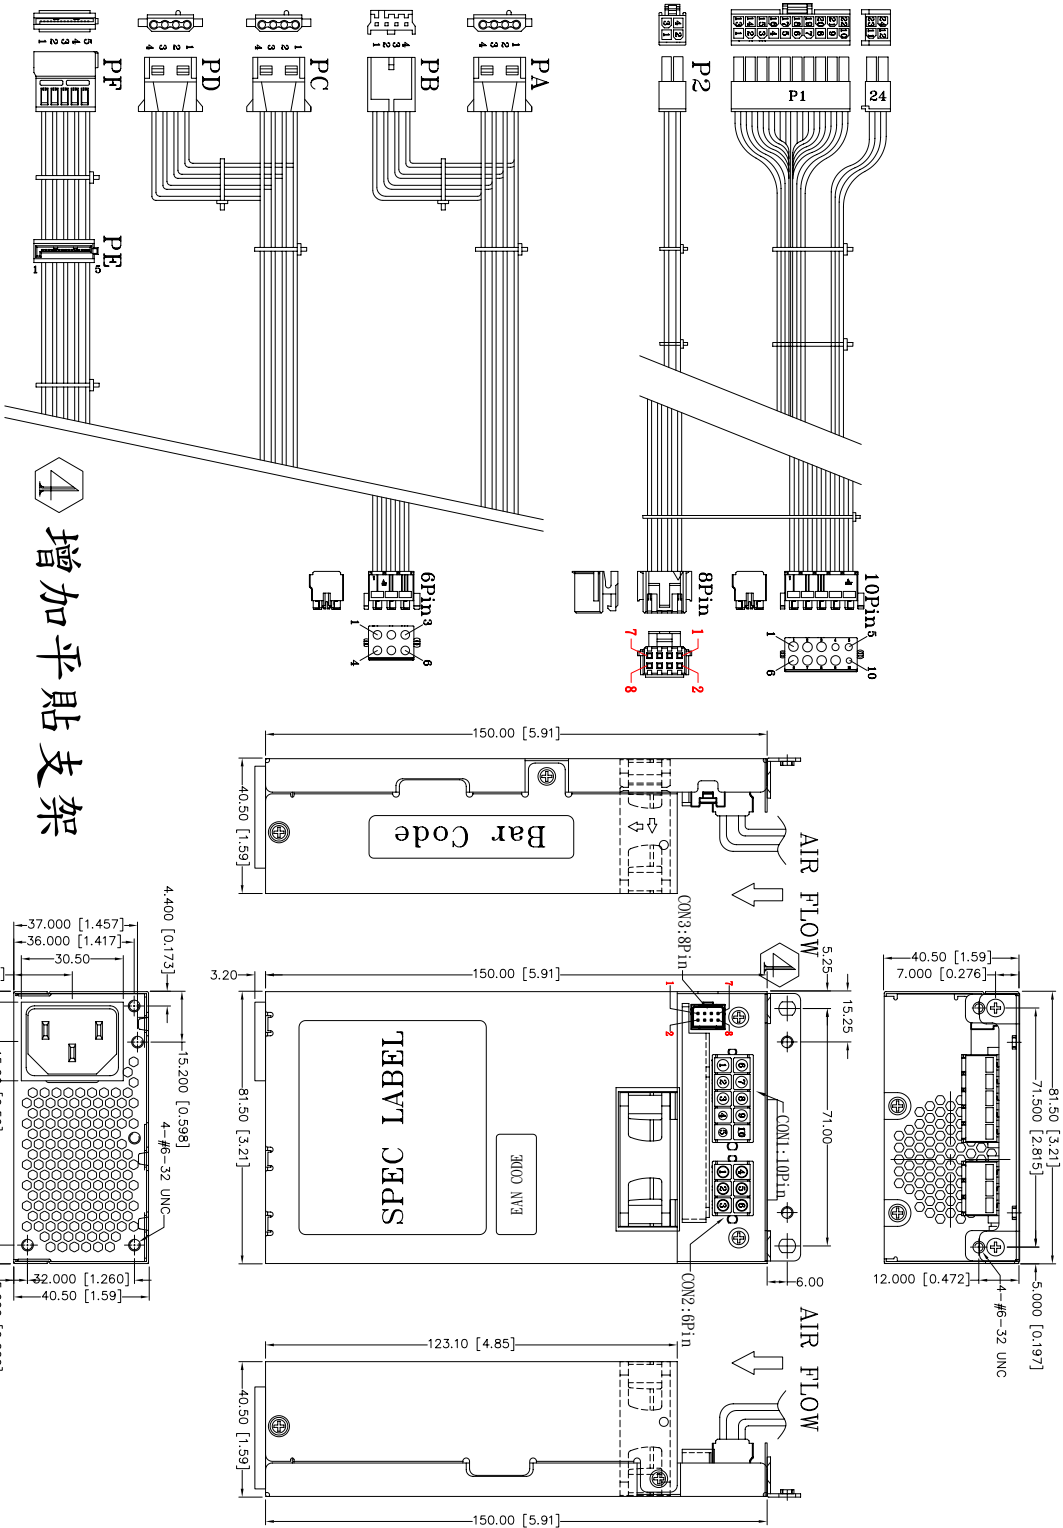

增加平貼支架

NOTE:

1. ALL THE LENGTH OF OUTPUT WIRES EXCLUDE HOUSING.
2. 公差: .XX=±0.5 [0.02]、.XXX=±0.25 [0.01]

UNIT:mm [inch]

REF. ID.	PIN NO.	SIGNAL	WIRE COLOR	GUAGE	CONNECTOR TYPE	CABLE LENGTH
P1	1	+3.3V	ORANGE	20	WST	400±15mm
	2	+3.3V	ORANGE	20	WST	
	3	COM	BLACK	20	H2002K1110Z	
	4	+5V	RED	20	+P4-	
	5	COM	BLACK	20	H45002K1110Z	
	6	+5V	RED	20	W	
	7	COM	BLACK	20	or DQUV.	
	8	PM-OK	GRAY	24		
	9	+5VSB	PURPLE	24		
	10	+5VSB	PURPLE	24		
	11	+12V	YELLOW	20		
	12	+12V	YELLOW	20		
	13	+3.3V	ORANGE	20		
	14	+3.3V	BROWN	24		
	15	-12V	BLUE	24		
	16	PS-ON	GREEN	24		
	17	PS-ON	GREEN	24		
	18	COM	BLACK	20		
	19	COM	BLACK	20		
	20	COM	BLACK	20		
P2	21	+5V	RED	20		
	22	+5V	RED	20		
	23	+5V	RED	20		
	24	COM	BLACK	20		
PA	1	COM	BLACK	20	MOLEX	410±15mm
	2	COM	BLACK	20	39-01-	
	3	+12V	YELLOW	20	2045	
	4	+12V	YELLOW	20	or BQUV.	
PB	1	+12V	YELLOW	20	WST	250±15mm
	2	COM	BLACK	20	P4-W202Z	
	3	COM	BLACK	20	or BQUV.	
	4	+5V	RED	20	AMP	
PC	1	+12V	YELLOW	20	WST	310±15mm
	2	COM	BLACK	20	171822-4	
	3	COM	BLACK	20	or BQUV.	
	4	+5V	RED	20	P4-A10202Z	
PD	1	+12V	YELLOW	20	WST	155±10mm
	2	COM	BLACK	20	P4-A10202Z	
	3	COM	BLACK	20	or BQUV.	
	4	+5V	RED	20	WST	
PF	1	+3.3V	ORANGE	20	WST	155±10mm
	2	COM	BLACK	20	P5-12701P00	
	3	+5V	RED	20	or BQUV.	
	4	COM	BLACK	20	WST	

P/N:9PA2203501

MODEL NO. : FSP220-50FGBB(F660001)	TITLE: ASSY	SHEET: 1 OF 1	REV:04
R&D(2)	PE	DATE	
周書宇		MAR.15.2019	
INTERIOR COUNTERSIGN:		FPS	