

C10-A1x

5-pin, Interface relays, 1-pole, plug-in, faston

Type	C10-A1x/ ... V Standard relay, 1 change-over contact		
Maximum contact load	10 A/250 V AC1	0,5 A/110 V DC1	
	10 A/30 V DC1	0,2 A/220 V DC1	
Recommended minimum contact load	1 mA/10 V (with 10 µAu)		
	10 mA/10 V (standard contact)		

Contacts

Material	Standard	Code 0	AgNi
	Optional	Code 8	AgNi+ 10 µAu
	Optional	Code 5	Ag Sn O
Rated current	10 A		
Switch-on current max. (20 ms)	30 A		
Switching voltage max.	250 V		
AC load	2,5 kVA		
DC load	see fig. 2		

Coil

Coil resistance	see table; tolerance ± 10 %
Pick-up voltage	≥ 0,8 x U _N
Release voltage	≥ 0,1 x U _N
Nominal power	1,1 VA (AC)/0,7 W (DC)

Coil table

VAC	Ω	mA	VDC	Ω	mA
24	290	45	12	224	53
48	1200	23	24	742	32
115	7.300	9,5	48	3.500	13,7
230	28.800	4,7	110	19.900	5,5

Insulation

	Volt rms, 1 min
Contact open	1000 V
Contact/coil	5 kV
Insulation resistance at 500 V	≥1 GΩ
Insulation, IEC 61810-5	4 kV/3

Specifications

Ambient temperature operation/storage	-40 (no ice)...60 °C / -40 ... 80 °C
Pick-up time/bounce time	10 ms/1 ms
Release time/bounce time	5 ms/3 ms
Mechanical life	AC: 10 Mill./DC: 20 Mill. switching cycles
AC voltage endurance at rated load	≥100000 switching cycles
Switching frequency at rated load	≤ 1200/h
Protection class	IP40
Weight	21 g

Standard types

AC 50 Hz/60 Hz: 24, 48, 115, (120), 230, (240)	C10-A10/AC ... V	C10-A18/AC ... V	C10-A15/AC ... V
LED	C10-A10X/AC ... V	C10-A18X/AC ... V	C10-A15X/AC ... V
RC suppressor	C10-A10R/AC...V	C10-A18R/AC...V	C10-A15R/AC...V
DC 12, 24, 48, 110	C10-A10/DC ... V	C10-A18/DC ... V	C10-A15/DC ... V
LED	C10-A10X/DC ... V	C10-A18X/DC ... V	C10-A15X/DC ... V
Free wheeling diode			
Polarity and free wheeling diode	C10-A10FX/DC...V	C10-A18FX/DC...V	C10-A15FX/DC ... V
AC/DC bridge rectifier 24 V, 48 V	C10-A10BX/UC ... V	C10-A18BX/UC ... V	C10-A15BX/UC ... V
"..." Enter the voltage for full type designation			

Accessories

Socket:	S10, S10-M, S10-K
---------	--------------------------



Connection diagram




Fig. 1 AC voltage endurance



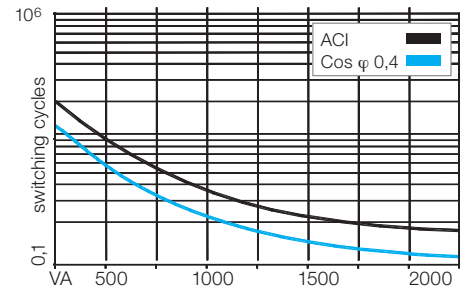


Fig. 2 DC load limit curve

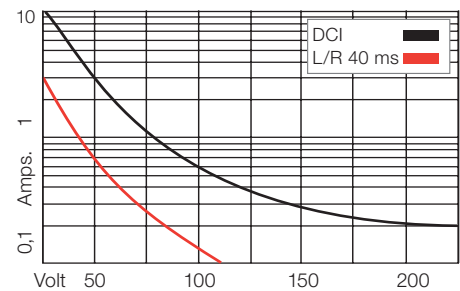

Dimensions [mm]

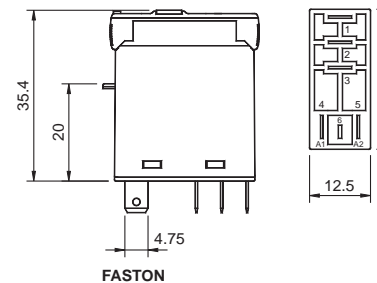

Technical approvals, conformities



IEC 61810; EN 60947