


FLANGE MOUNTED (FORM A-B5) - ALUMINIUM HOUSING

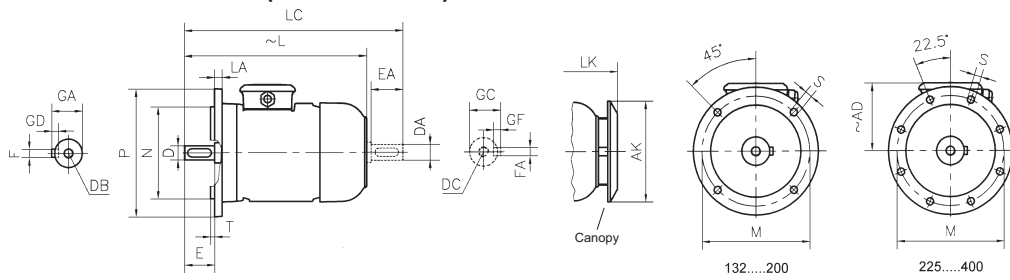

Note: The seating face of the flange lies in the same plane as the shoulder on the shaft

Frame Size	Number of pole	Dimensions of flanged motors : (D-Flange form A - DIN EN 50 347) mounting arrangements B5 ¹⁾ , V1, V3																									
		Flange Number	MØ	NØ	PØ	Clearance hole		T	LA	AD	AK Ø	L	LC	LK	E EA	DB ²⁾ DC	D Ø DA Ø	GA GC	FxGD FxGF								
						No.	SØ																				
132	S	2-4-6-8	FF 265	265	230	300	4	14,5	4	20	168	239	493	579	530	80	M12	38	41	10X8							
M																											
160	M	2-4-6-8	FF 300	300	250	350	4	18,5	5	20	225	303	601	717	658	110	M16	42	45	12X8							
	L												645	761	702												
180	M	2-4-6-8	FF 300	300	250	350	4	18,5	5	20	241	303	659	775	716	110	M16	48	51,5	14X9							
	L																										
200	L	2-4-6-8	FF 350	350	300	400	4	18,5	5	20	275	370	747	865	803	110	M20	55	59	16X10							
	S																				4-8	795	943	851	140	60	64
225	M	2	FF 400	400	350	450	8	18,5	5	20	285	370	790	908	846	110	M20	55	59	16X10							
		4-6-8																			820	968	876	140	60	64	18X11
		2																			895	1043	951	140	M20	60	64
250	M	2	FF 500	500	450	550	8	18,5	5	24	322	440	895	1043	951	140	M20	60	64	18X11							
		4-6-8																			65	69	18X11				
280	S	2	FF 500	500	450	550	8	18,5	5	24	350	440	958	1106	1014	140	M20	65	69	18X11							
		4-6-8																			75	79,5	20X12				
	M	2																			65	69	18X11				
		4-6-8																			75	79,5	20X12				
315	S	2	FF 600	600	550	660	8	24	6	24	510	571	1120	1270	1197	140	M20	65	69	18X11							
		4-6-8											85	90	22X14												
	M	2											1120	1270	1197	140					65	69	18X11				
		4-6-8											85	90	22X14												
		2											1190	1340	1267	140					65	69	18X11				
		4-6-8											85	90	22X14												
355	M	2	FF 740	740	680	800	8	24	6	32	635	571	1330	1510	1407	170	M20	80	85	22X14							
		4-6-8											100	106	28X16												
	L	2											1330	1510	1407	170	M20	80	85	22X14							
		4-6-8											100	106	28X16												
400	L	2	FF 940 ³⁾	940	880	1000	8	28	6	32	700	571	1560	1740	1637	170	M20	80	85	22X14							
		4-6-8											110	116	28X16												
Tolerances				j6																							

¹⁾ B5 and V3, are up to frame size 315M
²⁾ DB, DC - DIN 332-2 Form D
³⁾ IEC 60 072

All dimensions in mm.