

HELAVIA® membrane grommets DG in black polychloroprene rubber




HELAVIA®



DG HELAVIA

Material: polychloroprene rubber
Colours: black - grey (near RAL 7037)
Temperature range: -30 to +90°C
Tensile strength at break: 7 MPa
Ultimate elongation: > 400 %
Dielectric strength: > 13 kV/mm
Applications : Designed to close off unused entries in panels, enclosures and housings of all types. Wires and conduits can pass through the membrane if required.

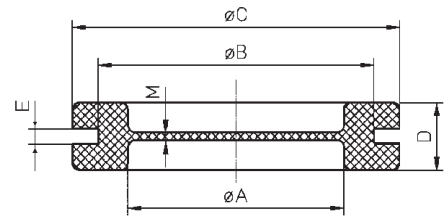

type	art. no.		dimensions (mm)	A	B	C	D	E	M
	black	grey							
	010	013							

• Standard membrane (1 and 1,5 mm)

DG 9/E1	0258 0361 010	-	100	9	15,5	20	7	1	1
DG 9	0258 0351 010	0258 0351 013	100	9	15,5	20	7	2	1
DG 11	0258 0352 010	0258 0352 013	100	11	18,5	23	7	2	1
DG 13,5	0258 0353 010	0258 0353 013	100	13,5	20,5	25	7	2	1
DG 16	0258 0354 010	0258 0354 013	100	16	22,5	27,5	7	2	1
DG 21	0258 0355 010	0258 0355 013	100	21	28	35	8	2	1
DG 29	0258 0356 010	-	50	29	37	44	9	2	1
DG 36	0258 0357 010	-	50	36	47	54	10	2,5	1
DG 48	0258 0358 010	-	50	48	60	68	10	2,5	1
DG 53	0258 0359 010	-	50	53	64	75	10	2,5	1,5
DG 69	0258 0360 010	-	50	69	79	90	10	2,5	1,5

New



DG M16	0258 0011 010	-	100	9	16	20	7	2	1
DG M20	0258 0012 010	0258 0012 013	100	13,5	20	25	7	2	1
DG M25	0258 0013 010	0258 0013 013	100	18,5	25	30,5	7	2	1
DG M32	0258 0014 010	0258 0014 013	100	25	32	39	8	2	1
DG M40	0258 0015 010	-	50	31	40	47	10	2,5	1
DG M50	0258 0016 010	-	50	39	50	57	10	2,5	1
DG M63	0258 0017 010	-	50	53	63	75	10	2,5	1
DG M68	0258 0019 010	-	50	53	68	75	10	2,5	1,5
DG M75	0258 0018 010	-	50	65	75	87	10	2,5	1

• Thick membrane

DG 16/E3	0258 0449 010	-	100	16	22,5	27,5	8	3	2
DG 16/E4	0258 0440 010	-	100	16	22,5	27,5	9	4	3
DG 21/E4	0258 0441 010	-	100	21	28	35	10	4	3
DG 29/E6	0258 0445 010	-	100	29	37	44	13	6	5
DG 36/E3	0258 0362 010	-	100	36	47	54	12	3	3



• Cross-cut membrane

										Length hole
DGC 11	0258 0401 010	-	100	11	18,5	23	7	2	1	10
DGC 13,5	0258 0402 010	-	100	13,5	20,5	25	7	2	1	10
DGC 16	0258 0403 010	-	100	16	22,5	27,5	7	2	1	14
DGC 21	0258 0404 010	-	100	21	28	35	8	2	1	17
DGC 29	0258 0405 010	-	50	29	37	44	9	2	1	25
DGC 36	0258 0406 010	-	50	36	47	54	10	2,5	1	32
DGC 48	0258 0407 010	-	50	48	60	68	10	2,5	1	42
DGC 53	0258 0408 010	-	50	53	64	75	10	2,5	1,5	25

