

# Electromechanical hour counters

## → Hour counters 48 X 48 - CHM48

- AC: capacity 100.000 hrs (99.999.99 hrs)
- DC: capacity 1.000.000 hrs (999.999.99 hrs)
- Operation indicator
- Panel mounted
- DIN rail mounted with connector base  
(accessory part number: 26546845)
- IP52
- Highly resistant to shocks and impacts
- Excellent visibility due to the large digit size



### Part numbers

Type	Operating frequency (Hz)	Voltages	Code
CHM48	50	20 → 30 V $\sim$	99772710
	50	42 → 48 V $\sim$	99772711
	50	100 → 130 V $\sim$	99772712
	50	360 → 440 V $\sim$	99772713
	50	187 → 264 V $\sim$	99772714
	60	100 → 130 V $\sim$	99772715
	60	187 → 264 V $\sim$	99772716
	60	360 → 440 V $\sim$	99772717
	60	20 → 30 V $\sim$	99772718
	60	42 → 48 V $\sim$	99772719
	---	10 → 30 V $\text{---}$	99772810
	---	36 → 80 V $\text{---}$	99772811
	---	100 → 130 V $\text{---}$	99772812

### Accessories


Description	Code
Adaptor for 72 x 72 mm cut-out	26546842
Adaptor for 55 x 55 mm cut-out	26546846
DIN rail adaptor	26546845

### General characteristics

General characteristics	
Counting capacity	V $\sim$ : 99 999.99 V $\text{---}$ : 999.999.99
Reset to zero	Not included
Read accuracy	1/100 h
Height digits (mm)	4
Colour of hour numbers	White on a black background
Colour of decimal digits	Red on a black background
Accuracy	V $\sim$ : frequency + 30 ms V $\text{---}$ : < 0.003% (24 hrs)
Counting input mode	Addition
Operation indicator	V $\sim$ : rotating red lines V $\text{---}$ : 1/100 hr 1 digit in 36 s
Degree of protection front face	IP52
Mounting	Any
Temperature limits use (°C)	-15 → +50
Temperature limits stored (°C)	-40 → +80
Certifications	UL (pending)
Connections (panel mounted version)	Screw terminals - 6.35 mm Faston connectors
Connections (DIN rail mounted version)	Screw terminals with accessory 26 546 845
Connection capacity	2.5 mm <sup>2</sup>
Consumption	V $\text{---}$ : 10 → 30 approx. 500 mW/100 → 130 approx. 750 mW/ V $\sim$ 50 Hz: 20 → 30 approx. 0.3 VA/42 → 48 approx. 0.25 VA/100 → 130 approx. 0.6 VA/187 → 264 approx. 1.2 VA/360 → 440 approx. 1.65 VA
Vibration resistance	50 m/s <sup>2</sup> (10-500 Hz) IEC 068-2-6
Test voltage for AC models	2 000 V $\sim$ 50 Hz
Weight (g)	50


# Dimensions (mm)

## Panel mounted

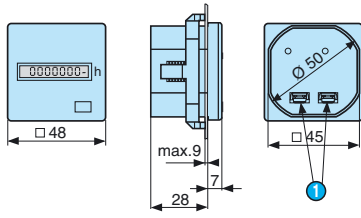


1 Screw terminals


## 26546845 - DIN rail mounted



## Panel cut-out



## 26546846 - Adaptor for 55 x 55 mm cut-out

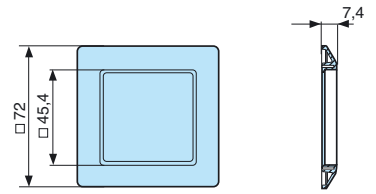

## 26546842 - Adaptor for 72 x 72 mm cut-out

