

SMP 8801 MG 5

Diffuse Proximity

Photoelectric Sensors



Product Data	
Function	Both
Operation Mode	Diffuse Proximity
Supply Voltage	20 - 250 V ac
Control Feature	Sensitivity pot. and light/dark switch
Connection	5 m cable
Sensing Range	1 m
Output	SCR
Output Status	N.C./N.O.
Light Source	Infrared (880 nm)
Housing Material	Stainless Steel
Housing	M18 x 1

Technical Data	
Supply Voltage	20 - 250 V ac
Voltage Ripple	15 %
Current Consumption	2 mA
Max. Output Load	200 mA
Max. Residual Voltage	8 V
Max. Operation Frequency	20 Hz
Response Time ton / toff	25 ms / 25 ms
Power On Indicator	Green LED
Output Indicator	Yellow LED
Hysteresis	Approx. 5 - 15 %
Opening Angle	+/- 4°
Housing Material, Front Lens	Polycarbonate
Housing Material, Sensor Housing	Stainless Steel (AISI 316 / 1.4401)
Cable	2 x 0,25 mm ²
Cable Sleeve	PVC Ø 5,2 mm


Environmental Data

Vibration	10 - 55 Hz, 0,5 mm
Shock	30 g
Operation Temperature	-20 to +60 °C
Storage Temperature	-40 to +80 °C
Sealing Class	IP 67
Light Immunity 15'	> 40 000 lux


Approvals



Wiring Diagram

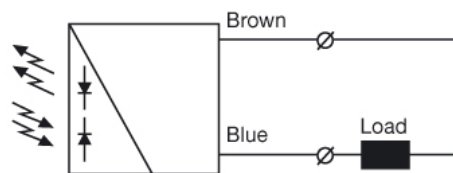

Parallel Displacement

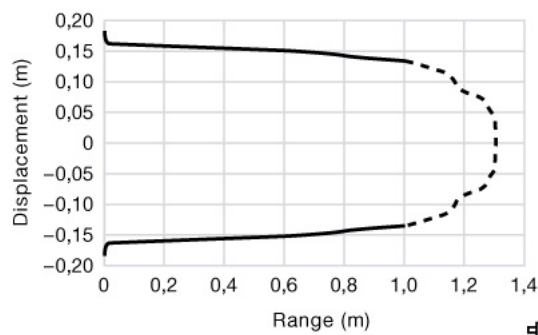

SMP 8x01 with 20cm x 20cm white paper

Dimensions

